



WOLTMAN 55 HPDR

WOLTMAN PILING & DRILLING RIGS

Powerful and compact, NEW DESIGN
250 kNm high speed Rotary head, Also suitable for
fitting a vibratory hammer (multifunctional)


DIESEKO GROUP

 **WOLTMAN**
PILING & DRILLING RIGS

WOLTMAN 55 HPDR

Woltman is continuously improving their range of equipment. Developments in relation to emission standards and fuel efficiency might result in different specifications. No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

TECHNICAL SPECIFICATIONS

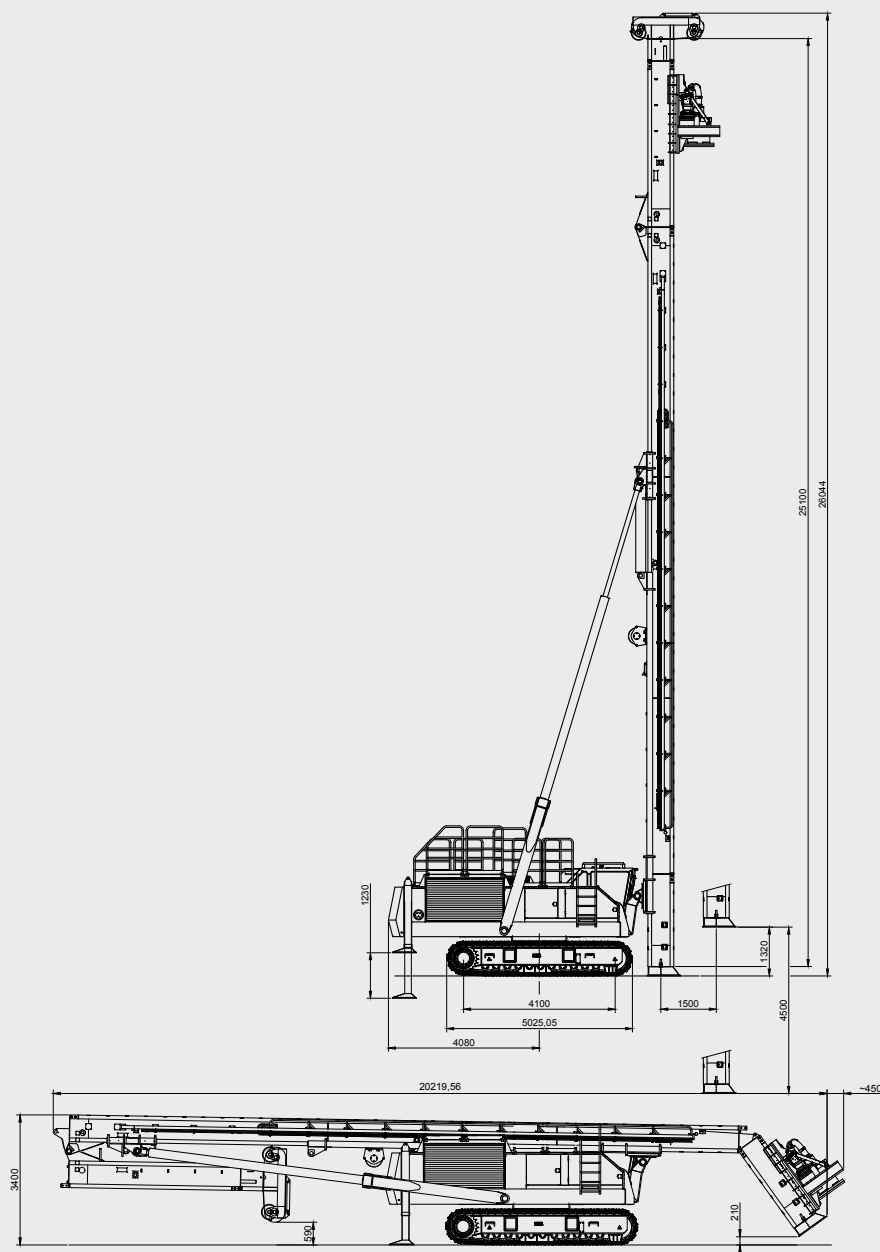

Operational specifications

Recommended Rotary head	PVE	RH-25 HS
Max. torque on leader	kNm	250
Leader length std. (max.)	mtr	25,1 (28,1)
Max. drill depth	mtr	23 (26)
Max. diameter	mm	1.000
Pull-up force	ton	60
Pull-down force	ton	20
Operational weight with RH25HS	ton	65
Max. oil flow	l/min.	800
Max. pressure	bar	350

Transport weights (excl. counterweight)

Transport weight w/o RH25 HS	ton	55
Transport weight incl. RH25 HS	ton	59
Removable counterweight	ton	6,2

Rig specifications

Engine	Caterpillar	C-18
Engine output	kW 555	HP 755
Hydraulics	Bosch Rexroth	
Hydraulic system	Open loop	