

WOLTMAN 55 VR



WOLTMAN PILING & DRILLING RIGS

Impressive torque, **Powerful pull**
Down, With tier IV engine, man
lift available, 250 kNm torque


DIESEKO GROUP

 **WOLTMAN**
PILING & DRILLING RIGS

WOLTMAN 55 VR

Woltman is continuously improving their range of equipment. Developments in relation to emission standards and fuel efficiency might result in different specifications. No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

TECHNICAL SPECIFICATIONS

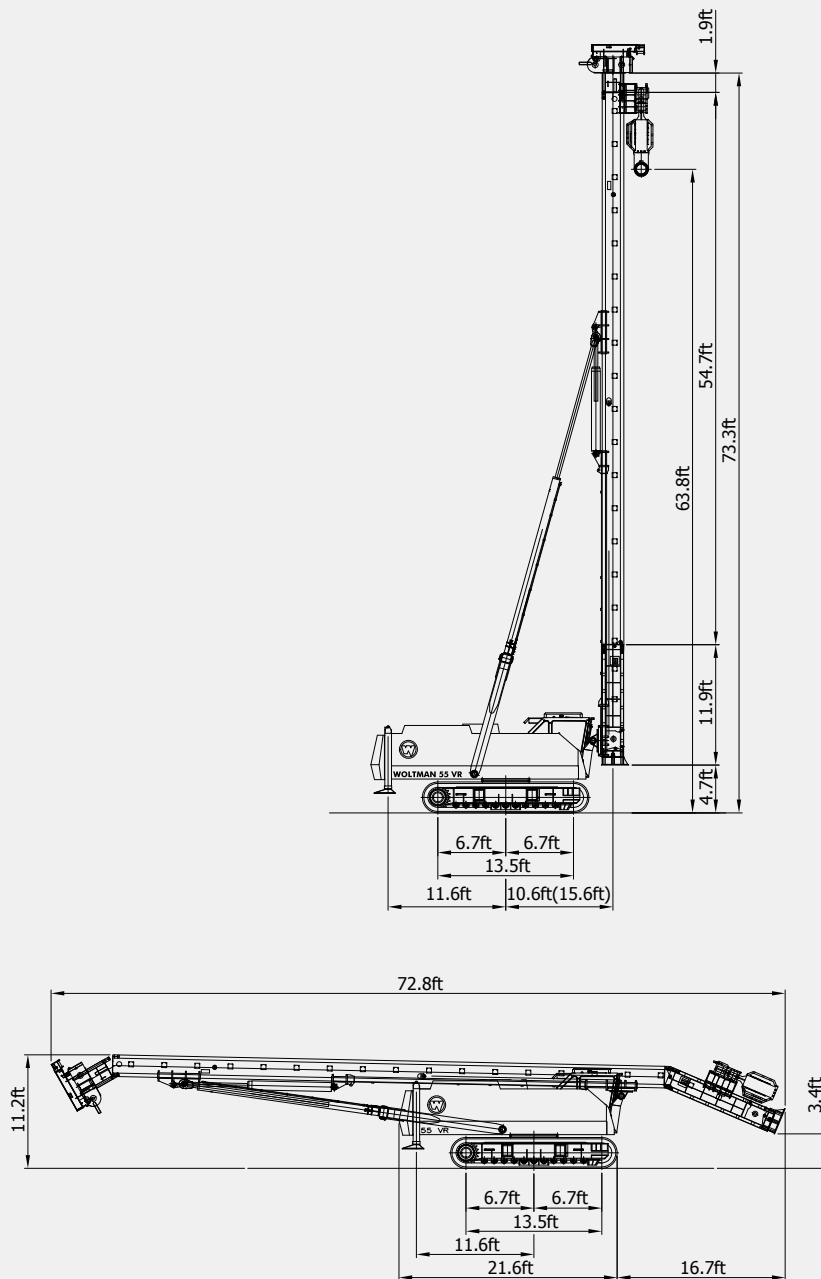

Operational specifications

Recommended vibratory hammer	PVE	23VML		
Max. weight (vibratory hammer + pile)	ton	15	lbs	33,069
Standard leader length	mtr	20.9	ft	68.6
Max. leader length	mtr	23.9	ft	78.4
Capacity main winch	ton	15	lbs	33,069
Capacity pull down winch	ton	10	lbs	22,046
Capacity aux. winch	ton	4	lbs	8,818
Max torque on leader	ton/m	25	ton/m	25
Operational width	mm	4400	ft	14.44
Transport width	mm	3450	ft	11.32

Weights

Operational weight excl. vibratory hammer	ton	59	lbs	130,073
Transport weight incl. vibratory hammer	ton	64	lbs	141,096

Rig specifications

Engine	Caterpillar C-18 tier 4F
Engine output	HP 755
Hydraulics	Bosch Rexroth
Hydraulic system	Openloop

* subject to capacity charts

Woltman Piling and Drilling Rigs B.V. Ambachtsweg 16, 3381 LN Giessenburg, the Netherlands
T: +31 (0)184 - 652 044 W: www.woltmanrigs.com E: info@woltmanrigs.com

Member of

DIESEKO GROUP