



WOLTMAN PDS 3000

WOLTMAN PILING & DRILLING RIGS

Versatile, **Dedicated design,**
Less deckspace required with
PDS system, High stability,
Heavy Duty boom,


DIESEKO GROUP

WOLTMAN
PILING & DRILLING RIGS

WOLTMAN PDS 3000

Woltman is continuously improving their range of equipment. Developments in relation to emission standards and fuel efficiency might result in different specifications. No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

TECHNICAL SPECIFICATIONS

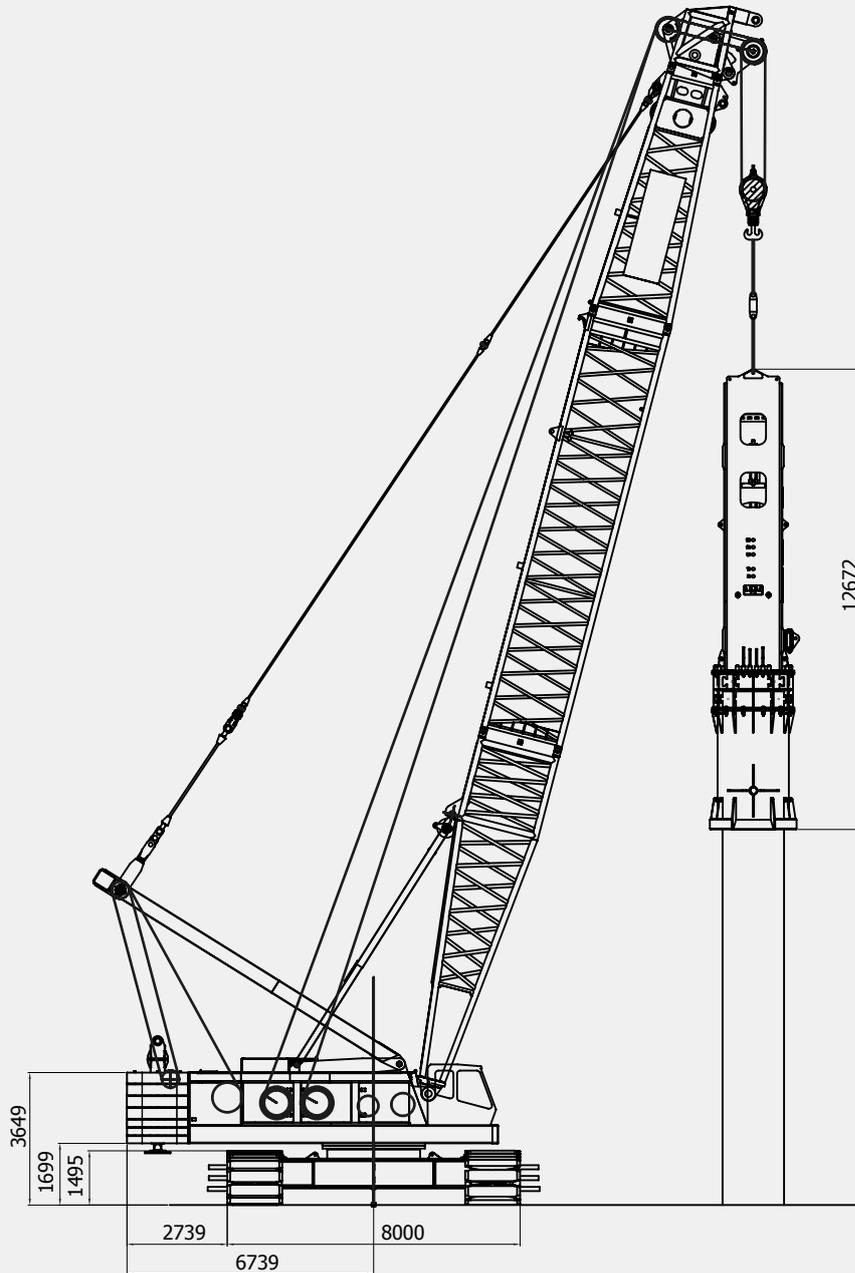

All dimensions are in millimeters

Operational specifications

| | | |
|-------------------------------|----------------|------------------------|
| Max. lift capacity w/o leader | 300 tons @ 5 m | 661,386 tons @ 16.4 ft |
| Max. pile + hammer weight* | ton 100 | lbs 220,462 |
| Leader length standard | mtr 55 | ft 180.5 |
| Leader length max | mtr 60 | ft 196.9 |
| Boom length standard | mtr 54 | ft 177.2 |
| Boom length optional | mtr 60-80 | ft 196.9-262.5 |
| Capacity main winches | ton 20 | lbs 44,092 |
| Capacity auxiliary | ton 15 | lbs 33,069 |
| Capacity leader winch | ton 20 | lbs 44,092 |

Weights

| | | |
|-----------------------------------|---------|-------------|
| Operational weight w/o leader | ton 265 | lbs 584,224 |
| Weight in PDS config. excl. tools | ton 350 | lbs 771,617 |
| Total counterweight | ton 105 | lbs 231,485 |
| Transport weight excl. boom | ton 91 | lbs 200,620 |

Rig specifications

| | | | |
|------------------|-------------------------|--------|--|
| Engine | Caterpillar C13 Stage 4 | | |
| Engine output | kW 350 | HP 475 | |
| Hydraulic system | Bosch Rexroth | | |
| Hydraulic system | Open Loop | | |

* subject to capacity charts

Woltman Piling and Drilling Rigs B.V. Ambachtsweg 16, 3381 LN Giessenburg, the Netherlands
T: +31 (0)184 - 652 044 W: www.woltmanrigs.com E: info@woltmanrigs.com

Member of

DIESEKO GROUP