






Specification sheet




PVE 1600 TIER 2

Hydraulic Power Pack

English

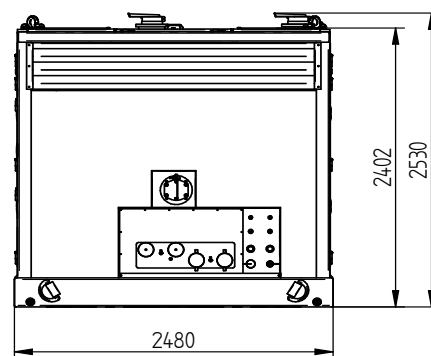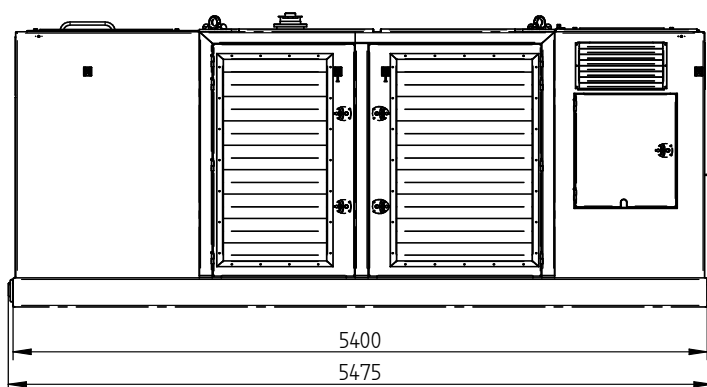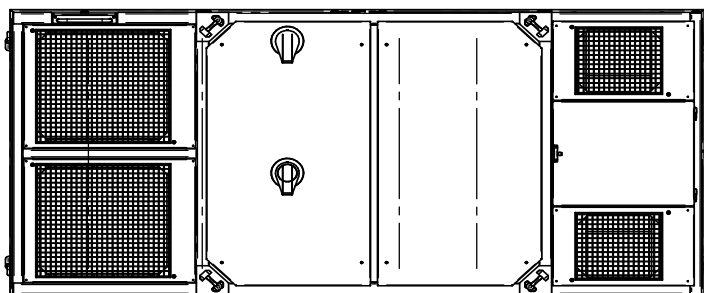**Specifications :****PVE 1600 TIER 2**

Diesel Engine	Volvo TAD 1643 VE-B (2x)	
Max. theoretical power	1130/1536	kW/HP
Max. frequency	1900	rpm
Max. operating pressure	350	bar
Hydraulic pump	Rexroth	
Max. oil flow	1710	L/min
Diesel oil	1520	L
DEF (AdBlue) capacity	N.A.	L
Hydraulic oil	2640	L
Weight without fuel	13700	kg
Weight filled up	15000	kg

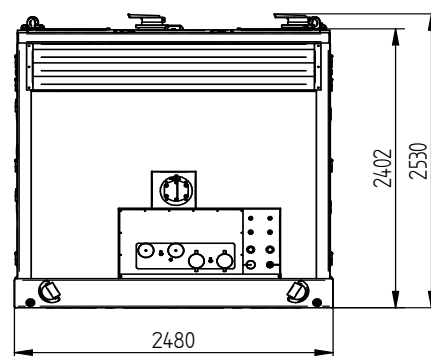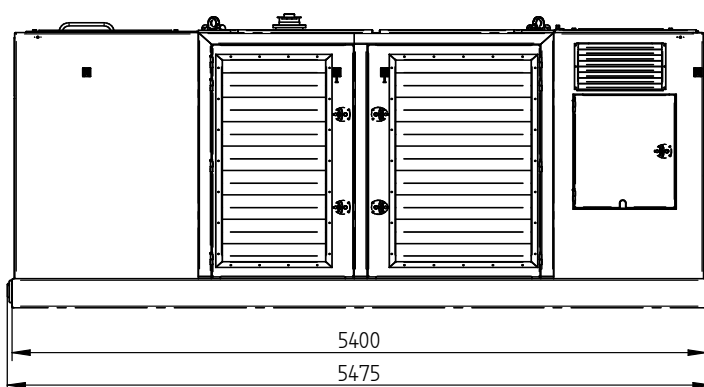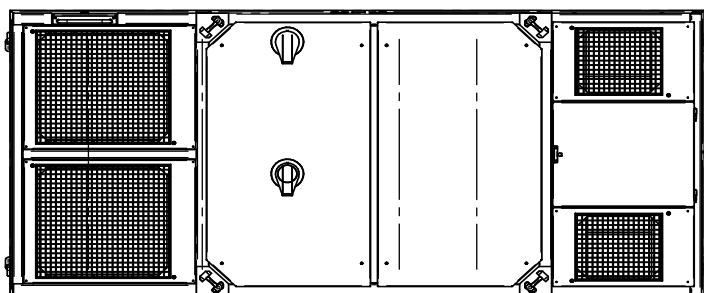

Technische Daten :

PVE 1600 TIER 2




Dieselmotor	Volvo TAD 1643 VE-B (2x)	
Max. theoretische Leistung	1130/1536	kW/HP
Max. Drehzahl	1900	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Rexroth	
Max. Fördermenge	1710	L/min
Diesel Öl	1520	L
DAF (AdBlue) kapazität	N.A.	L
Hydraulische Öl	2640	L
Gewicht ohne Diesel Öl	13700	kg
Gewicht	15000	kg



Spécifications

PVE 1600 TIER 2

Groupe hydraulique

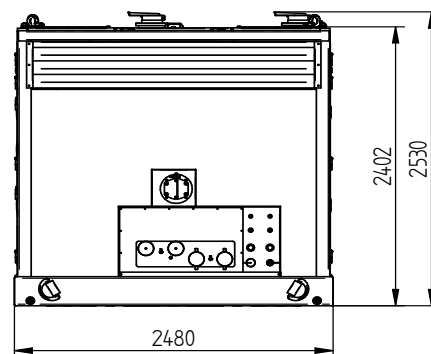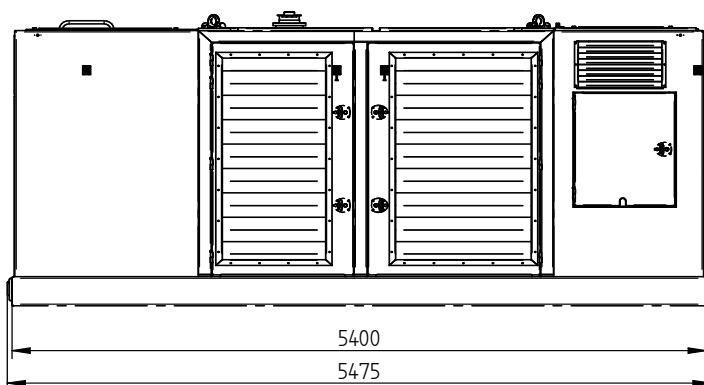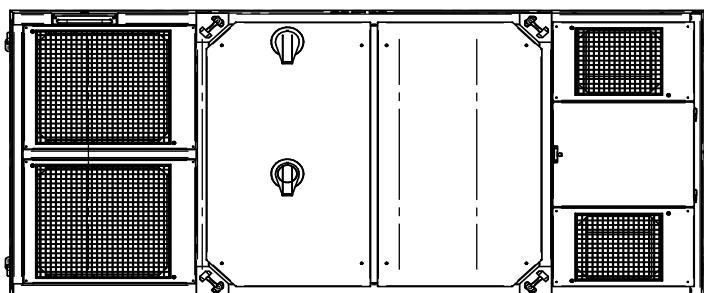

Spécifications

PVE 1600 TIER 2

Moteur Diesel	Volvo TAD 1643 VE-B (2x)	
Puissance théorique max.	1130/1536	kW/HP
Max. fréquence	1900	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Rexroth	
Débit d'huile max.	1710	L/min
Huile diesel	1520	L
Capacité FED (AdBlue)	N.A.	L
Huile hydraulique	2640	L
Poids sans huile diesel	13700	kg
Poids	15000	kg






Specificaties

PVE 1600 TIER 2

Hydraulisch aggregaat

Nederlands

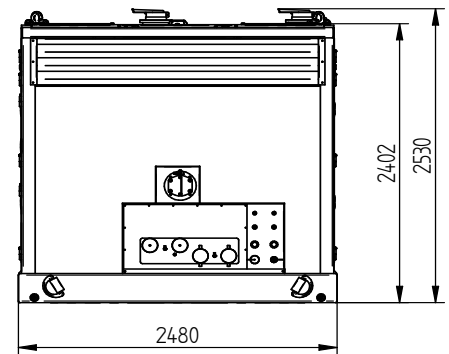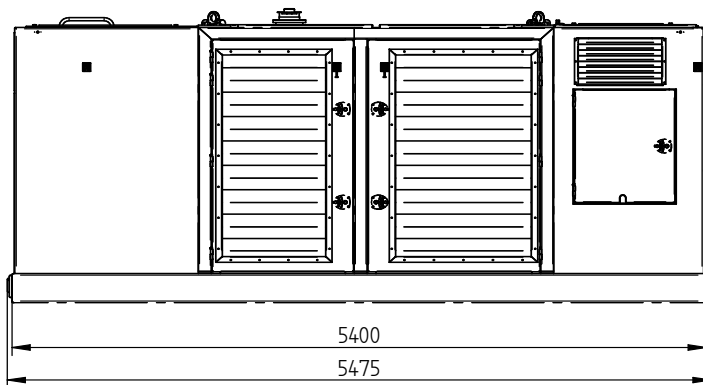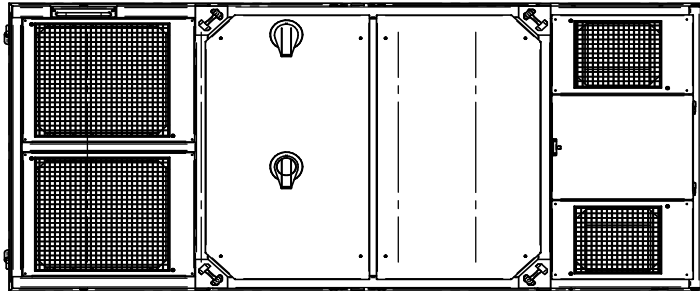

Specificaties

PVE 1600 TIER 2

Dieselmotor	Volvo TAD 1643 VE-B (2x)	
Max. theoretisch vermogen	1130/1536	kW/HP
Max. toerental	1900	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Rexroth	
Max. olie doorstroming	1710	L/min
Diesel olie	1520	L
DEF (AdBlue) capaciteit	N.A.	L
Hydraulische olie	2640	L
Gewicht zonder diesel	13700	kg
Gewicht	15000	kg






Especificaciones

PVE 1600 TIER 2

Unidad de potencia

Español

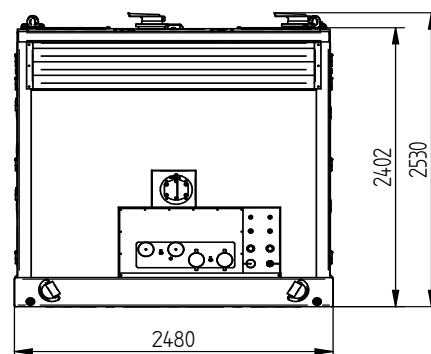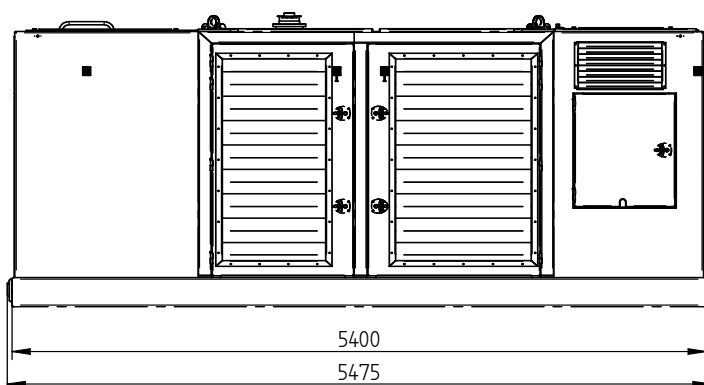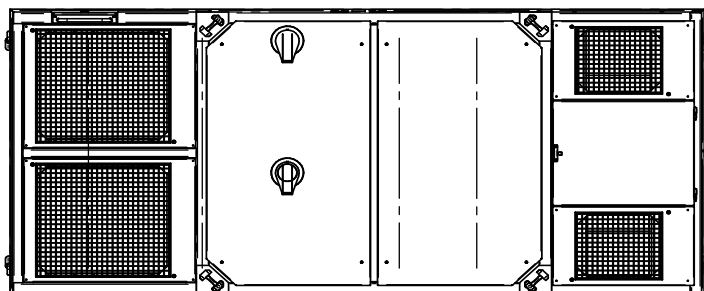

Especificaciones

PVE 1600 TIER 2

Motor de diesel	Volvo TAD 1643 VE-B (2x)	
Potencia Máxima teórica	1130/1536	kW/HP
Frecuencia máxima	1900	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Rexroth	
Flujo de aceite máximo	1710	L/min
Gasóleo	1520	L
Capacidad DEF (AdBlue)	N.A.	L
El aceite hidráulico	2640	L
Peso sin gasóleo	13700	kg
Peso	15000	kg






Specifications

PVE 1600 TIER 2

Hydraulic Power Pack

USA

Dimensions in inches

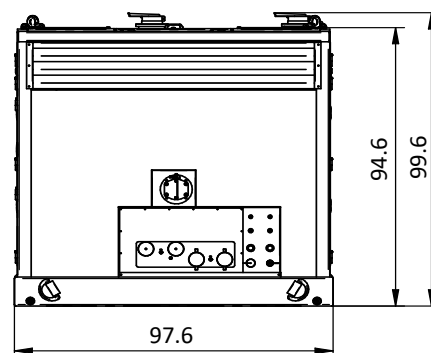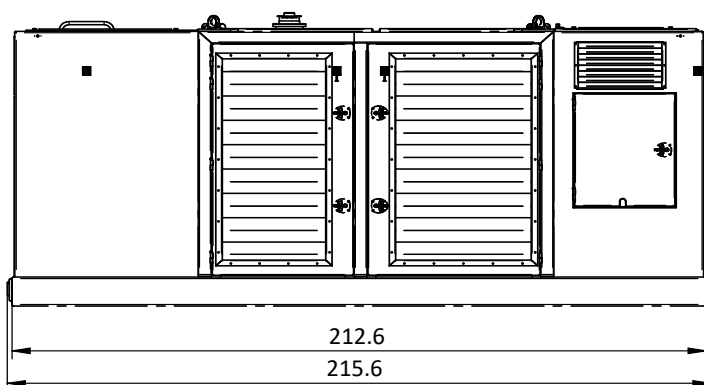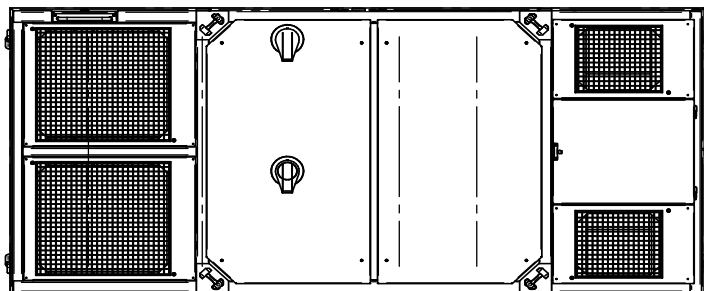

Specifications

PVE 1600 TIER 2

Diesel Engine	Volvo TAD 1643 VE-B (2x)	
Max. theoretical power	1,130/1,536	kW/HP
Max. frequency	1,900	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Rexroth	
Max. oil flow	452	gal/min
Diesel Fuel	402	gal
DEF (AdBlue) capacity	N.A.	gal
Hydraulic oil	697	gal
Weight without fuel	30,203	lbs
Weight with fuel	33,069	lbs






Specificatii

PVE 1600 TIER 2

unitate de putere hidraulica

românesc

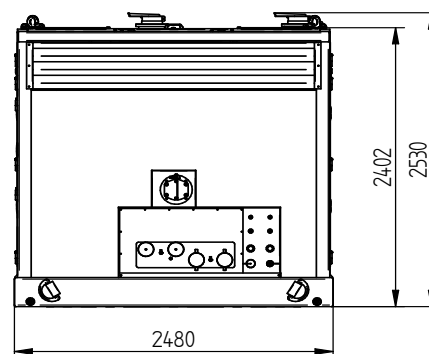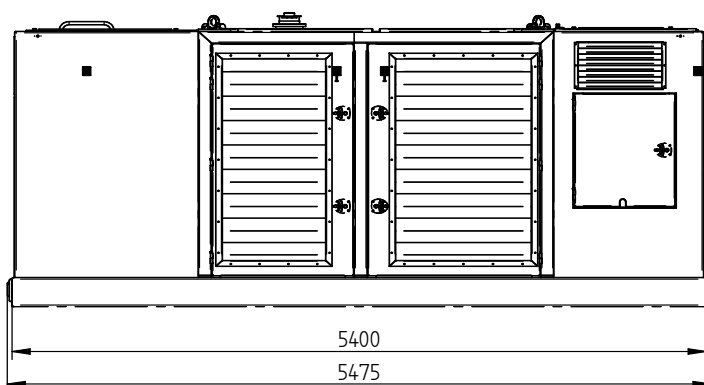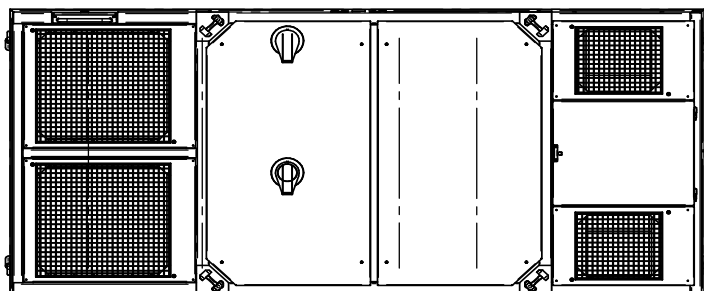

Specificatii :

PVE 1600 TIER 2

Motor diesel	Volvo TAD 1643 VE-B (2x)	
Puterea maxima teoretica	1130/1536	kW/HP
Frecventa maxima	1900	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Rexroth	
Debit maxim de ulei	1710	L/min
motorină	1520	L
Capacitate rezervor aditiv AdBlue	N.A.	L
Ulei hidraulic	2640	L
Greutatea fara combustibil	13700	kg
Greutatea cu combustibil	15000	kg