






Specification sheet

PVE 200 STAGE V / TIER 4F

Hydraulic Power Pack

English

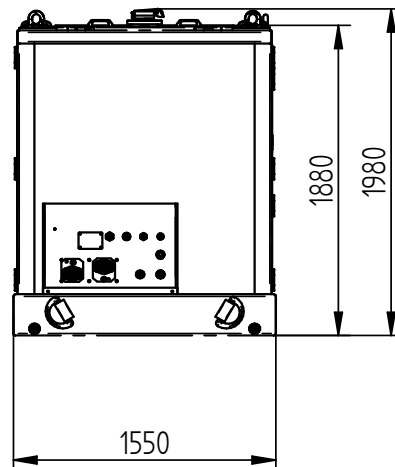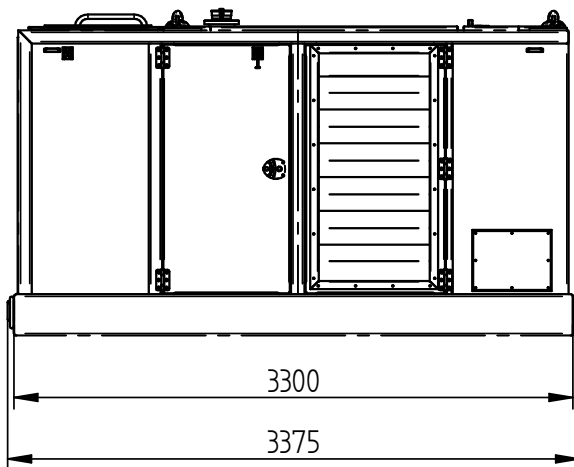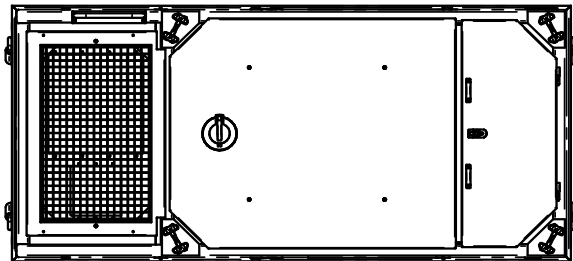

Specifications :

PVE 200 STAGE V / TIER 4F




Diesel Engine	Volvo TAD 582 VE	
Max. theoretical power	160/218	kW/HP
Max. frequency	2300	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	211	L/min
Diesel oil	490	L
DEF (AdBlue) capacity	25	L
Hydraulic oil	540	L
Weight without fuel	3790	kg
Weight filled up	4250	kg



Technische Daten PVE 200 STAGE V / TIER 4F

Aggregat

Deutsch

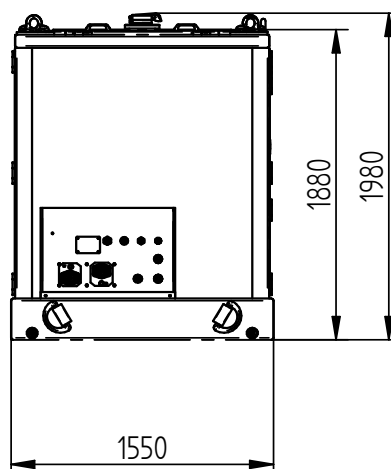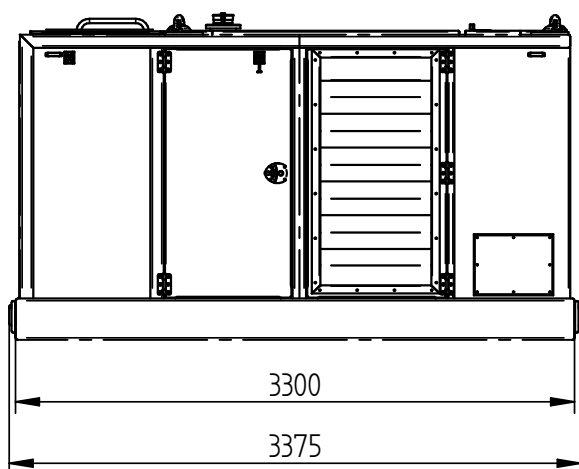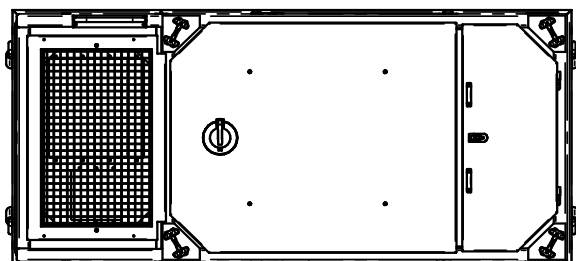**Technische Daten :****PVE 200 STAGE V / TIER 4F**

Dieselmotor	Volvo TAD 582 VE	
Max. theoretische Leistung	160/218	kW/HP
Max. Drehzahl	2300	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	211	L/min
Diesel Öl	490	L
DAF (AdBlue) kapazität	25	L
Hydraulische Öl	540	L
Gewicht ohne Diesel Öl	3790	kg
Gewicht	4250	kg






Spécifications

PVE 200 STAGE V / TIER 4F

Groupe hydraulique

Français

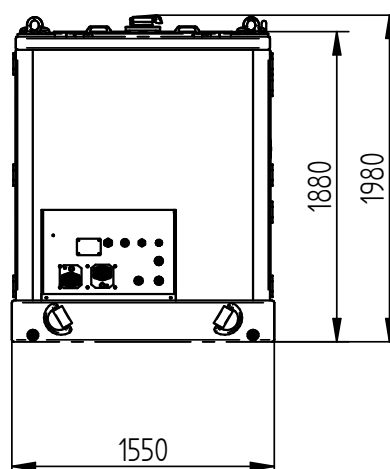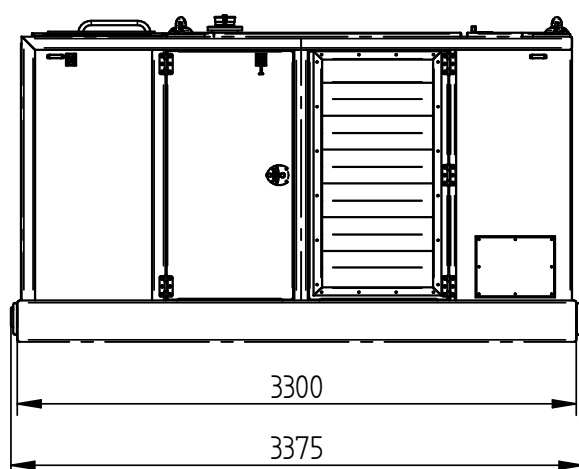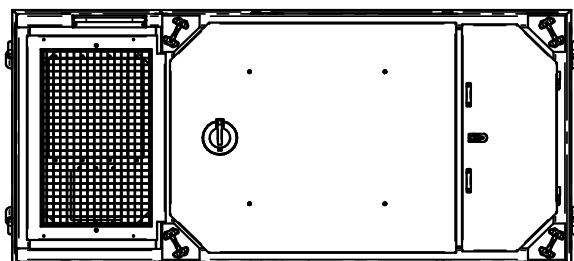

Spécifications

PVE 200 STAGE V / TIER 4F

Moteur Diesel	Volvo TAD 582 VE	
Puissance théorique max.	160/218	kW/HP
Max. fréquence	2300	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	211	L/min
Huile diesel	490	L
Capacité FED (AdBlue)	25	L
Huile hydraulique	540	L
Poids sans huile diesel	3790	kg
Poids	4250	kg






Specificaties

PVE 200 STAGE V / TIER 4F

Hydraulisch aggregaat

Nederlands

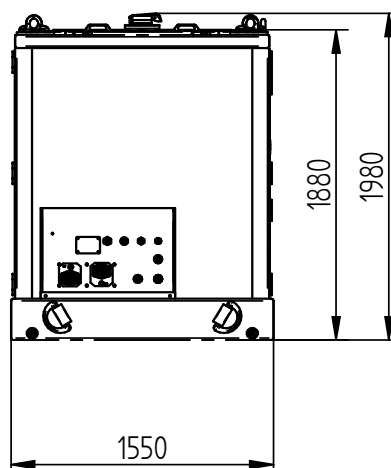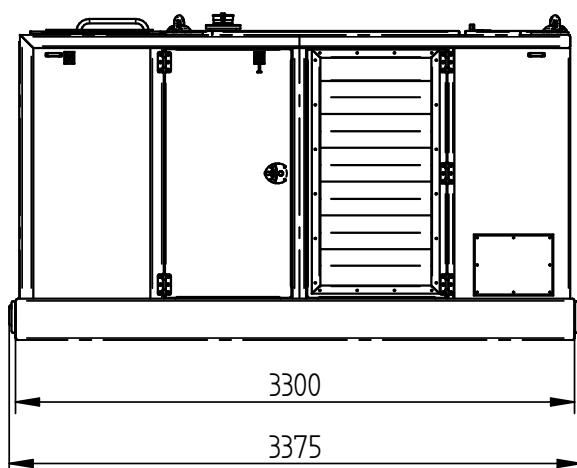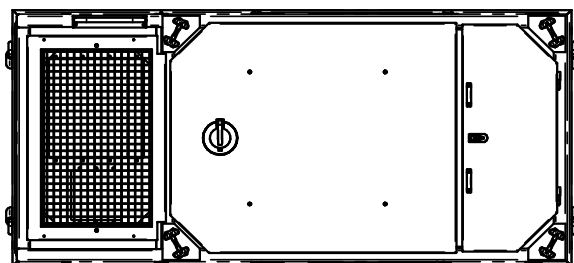

Specificaties

PVE 200 STAGE V / TIER 4F

Dieselmotor	Volvo TAD 582 VE	
Max. theoretisch vermogen	160/218	kW/HP
Max. toerental	2300	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	211	L/min
Diesel olie	490	L
DEF (AdBlue) capaciteit	25	L
Hydraulische olie	540	L
Gewicht zonder diesel	3790	kg
Gewicht	4250	kg






Especificaciones

PVE 200 STAGE V / TIER 4F

Unidad de potencia

Español

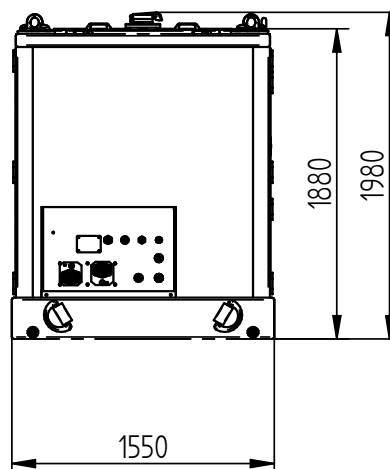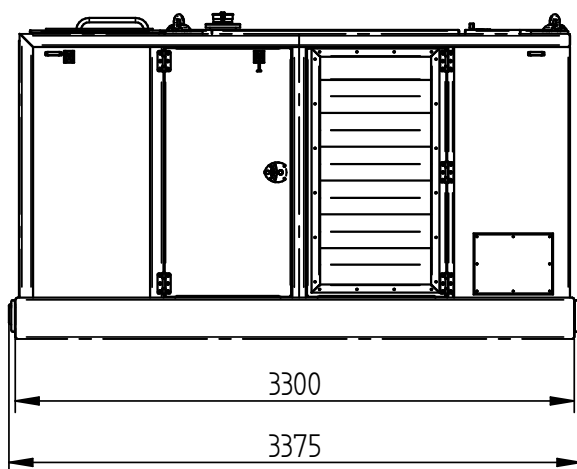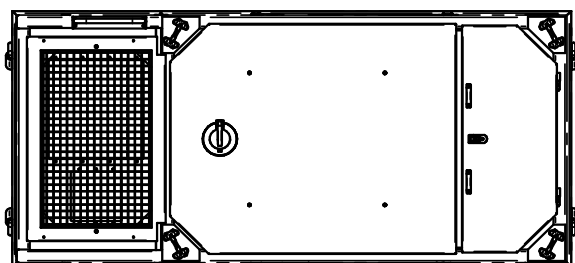

Especificaciones

PVE 200 STAGE V / TIER 4F

Motor de diesel	Volvo TAD 582 VE	
Potencia Máxima teórica	160/218	kW/HP
Frecuencia máxima	2300	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Parker	
Flujo de aceite máximo	211	L/min
Gasóleo	490	L
Capacidad DEF (AdBlue)	25	L
El aceite hidráulico	540	L
Peso sin gasóleo	3790	kg
Peso	4250	kg






Specifications

PVE 200 STAGE V / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

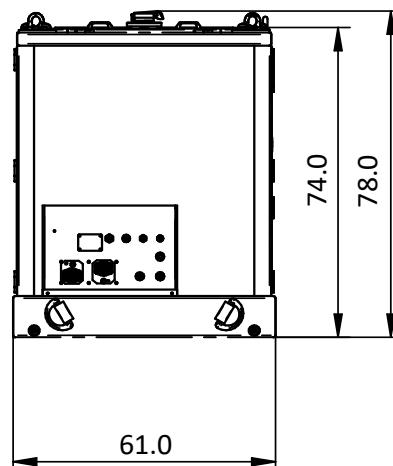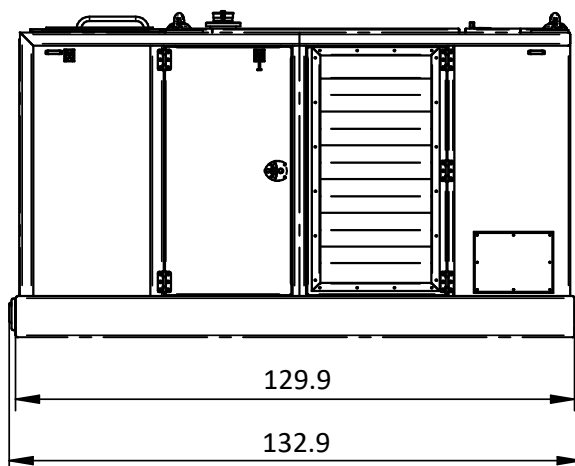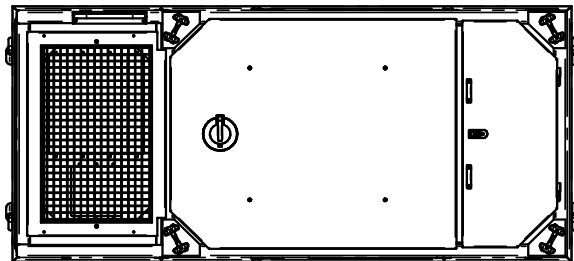

Specifications			PVE 200 STAGE V / TIER 4F
Diesel Engine	Volvo TAD 582 VE		
Max. theoretical power	160/218		kW/HP
Max. frequency	2,300		rpm
Max. operating pressure	5,076		psi
Hydraulic pump	Parker		
Max. oil flow	56		gal/min
Diesel Fuel	129		gal
DEF (AdBlue) capacity	7		gal
Hydraulic oil	143		gal
Weight without fuel	8,356		lbs
Weight with fuel	9,370		lbs






Specificatii

PVE 200 STAGE V / TIER 4F

unitate de putere hidraulica

românesc

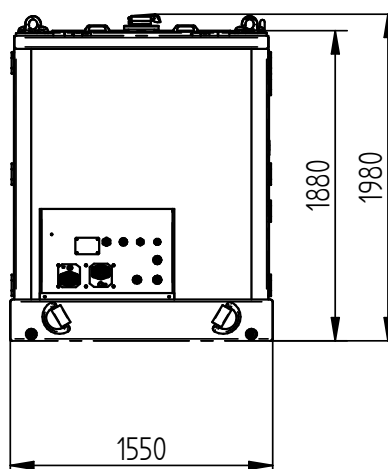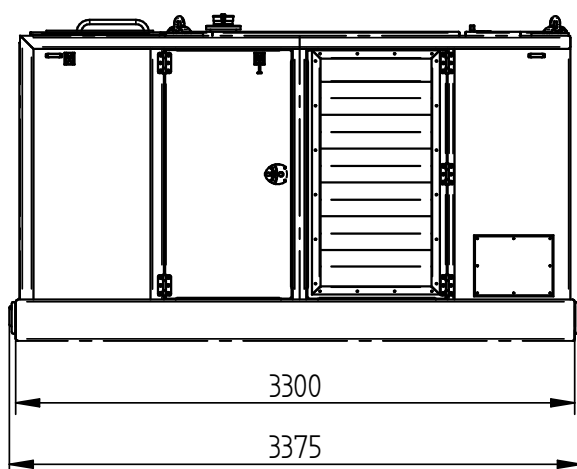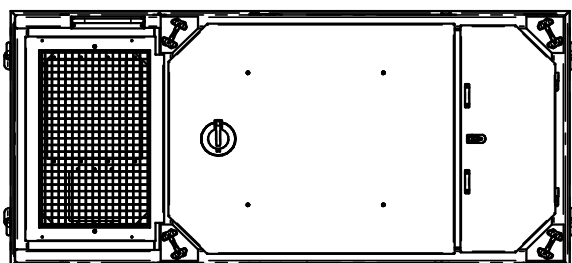**Specificatii :****PVE 200 STAGE V / TIER 4F**

Motor diesel	Volvo TAD 582 VE	
Puterea maxima teoretica	160/218	kW/HP
Frecventa maxima	2300	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit maxim de ulei	211	L/min
motorină	490	L
Capacitate rezervor aditiv AdBlue	25	L
Ulei hidraulic	540	L
Greutatea fara combustibil	3790	kg
Greutatea cu combustibil	4250	kg