






Specification sheet

PVE 3200 STAGE - / TIER 2

Hydraulic Power Pack

English

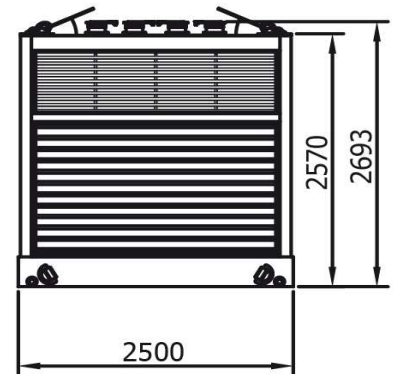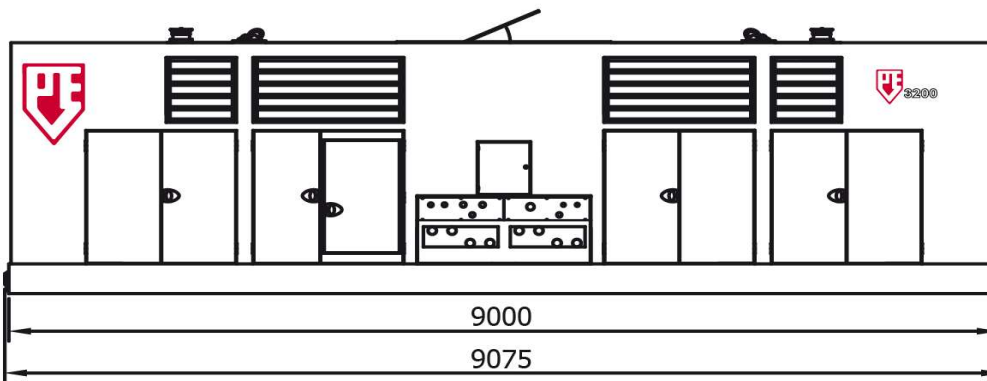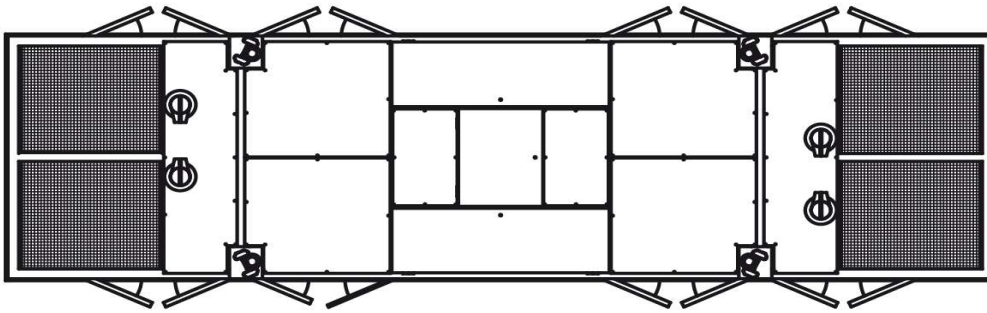

Specifications :

PVE 3200 STAGE - / TIER 2




Diesel Engine	Volvo TAD 1643 VE (4x)	
Max. theoretical power	2260/3072	kW/HP
Max. frequency	1850	rpm
Max. operating pressure	350	bar
Hydraulic pump	Rexroth	
Max. oil flow	3330	L/min
Diesel oil	3970	L
DEF (AdBlue) capacity	N.A.	L
Hydraulic oil	4900	L
Weight without fuel	27800	kg
Weight filled up	31000	kg



Technische Daten PVE 3200 STAGE - / TIER 2

Aggregat

Deutsch

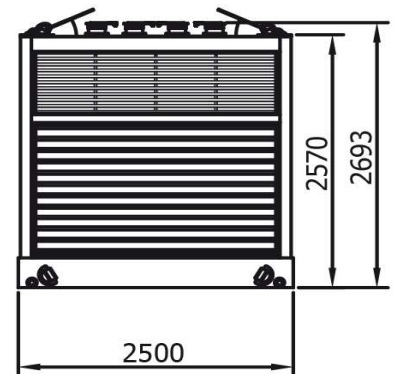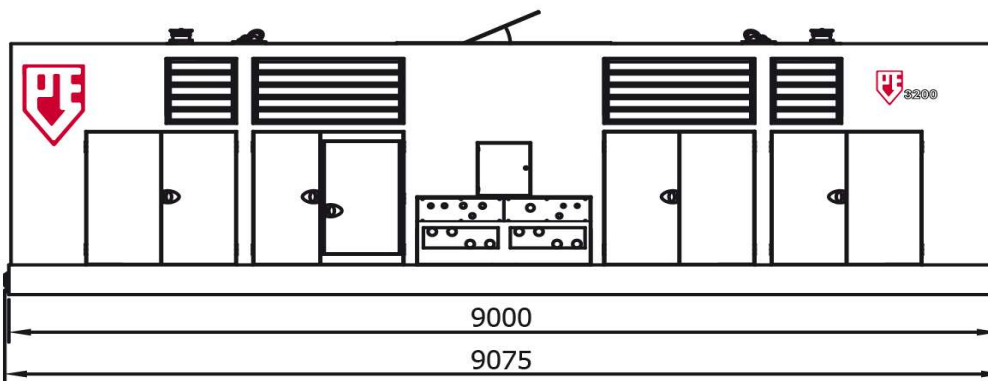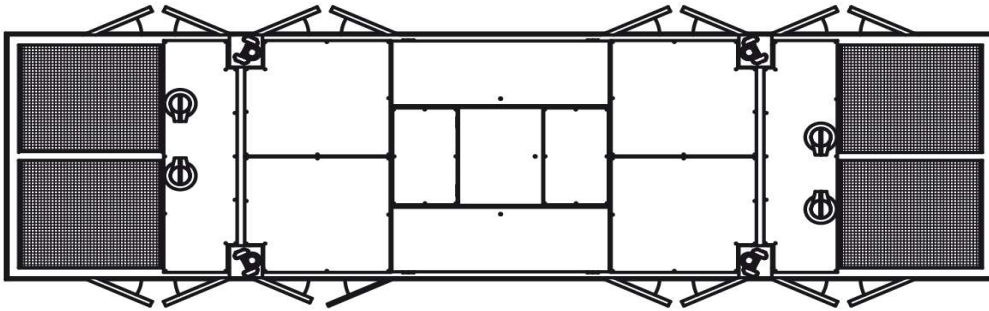

Technische Daten :

PVE 3200 STAGE - / TIER 2

Dieselmotor	Volvo TAD 1643 VE (4x)	
Max. theoretische Leistung	2260/3072	kW/HP
Max. Drehzahl	1850	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Rexroth	
Max. Fördermenge	3330	L/min
Diesel Öl	3970	L
DAF (AdBlue) kapazität	N.A.	L
Hydraulische Öl	4900	L
Gewicht ohne Diesel Öl	27800	kg
Gewicht	31000	kg






Spécifications

PVE 3200 STAGE - / TIER 2

Groupe hydraulique

Français

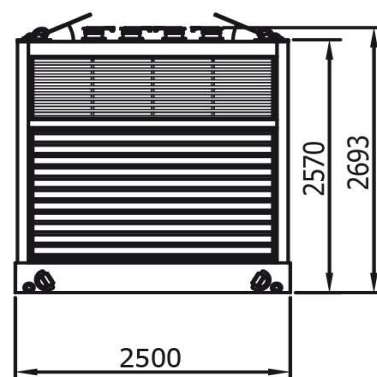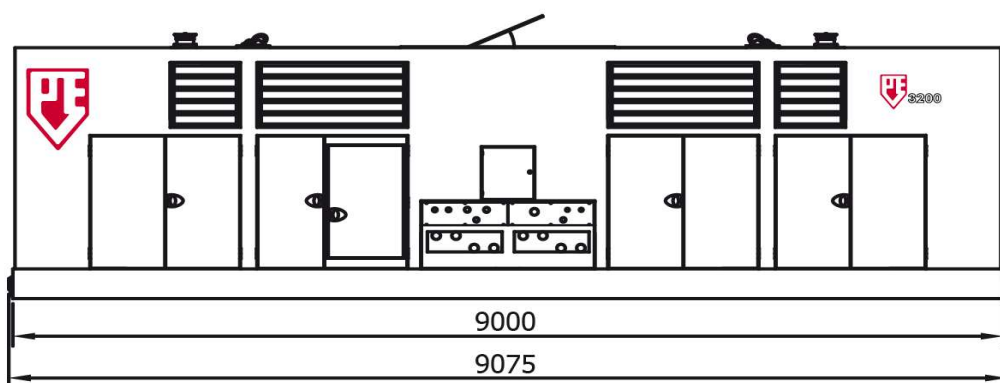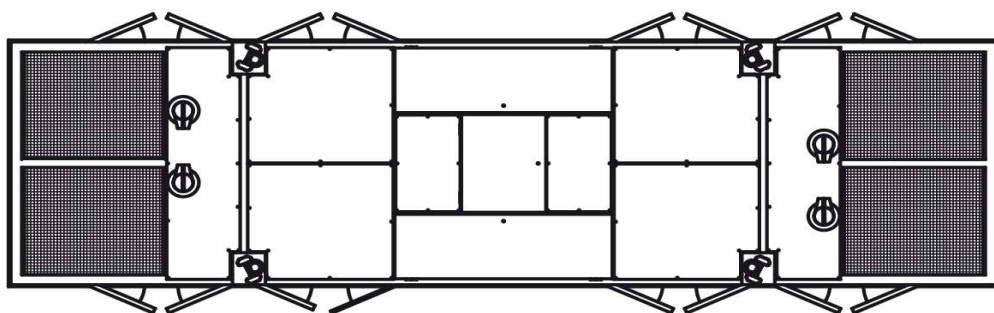

Spécifications

PVE 3200 STAGE - / TIER 2

Moteur Diesel	Volvo TAD 1643 VE (4x)	
Puissance théorique max.	2260/3072	kW/HP
Max. fréquence	1850	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Rexroth	
Débit d'huile max.	3330	L/min
Huile diesel	3970	L
Capacité FED (AdBlue)	N.A.	L
Huile hydraulique	4900	L
Poids sans huile diesel	27800	kg
Poids	31000	kg






Specificaties

PVE 3200 STAGE - / TIER 2

Hydraulisch aggregaat

Nederlands

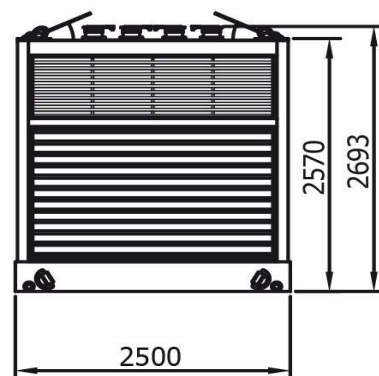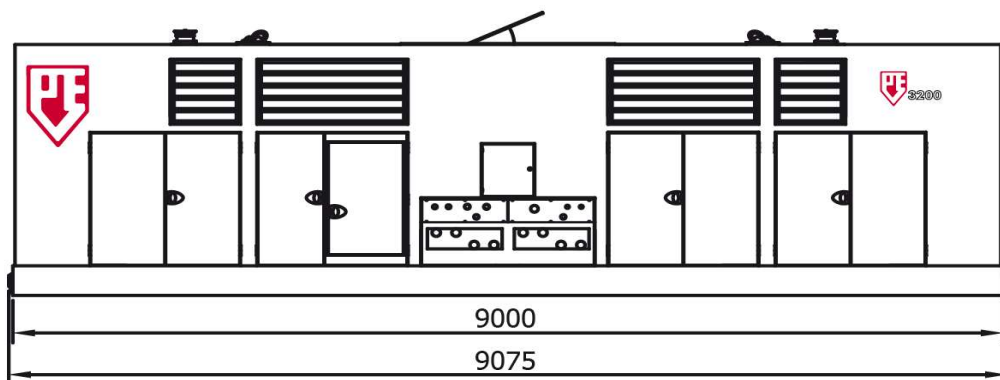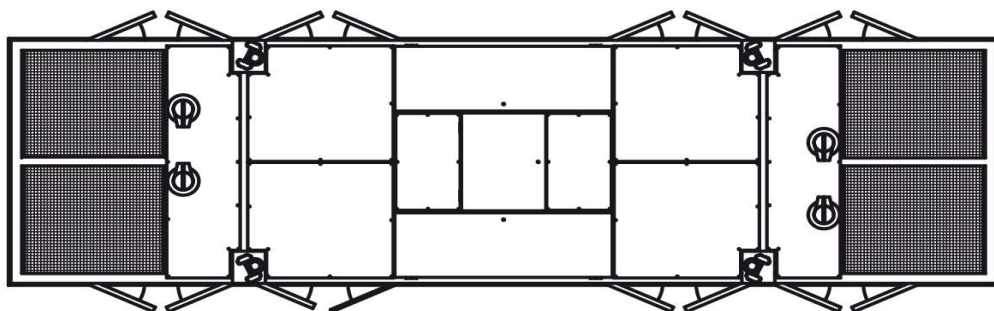

Specificaties

PVE 3200 STAGE - / TIER 2




Dieselmotor	Volvo TAD 1643 VE (4x)	
Max. theoretisch vermogen	2260/3072	kW/HP
Max. toerental	1850	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Rexroth	
Max. olie doorstroming	3330	L/min
Diesel olie	3970	L
DEF (AdBlue) capaciteit	N.A.	L
Hydraulische olie	4900	L
Gewicht zonder diesel	27800	kg
Gewicht	31000	kg



Especificaciones PVE 3200 STAGE - / TIER 2

Unidad de potencia

Español

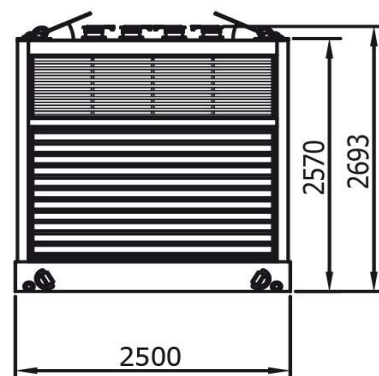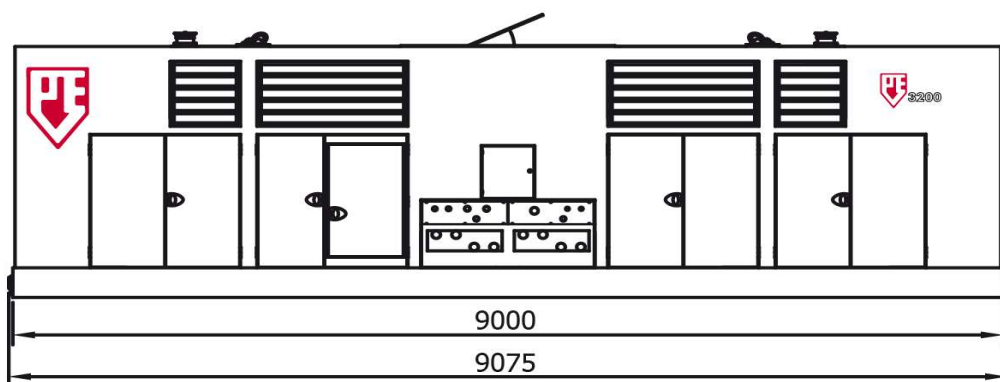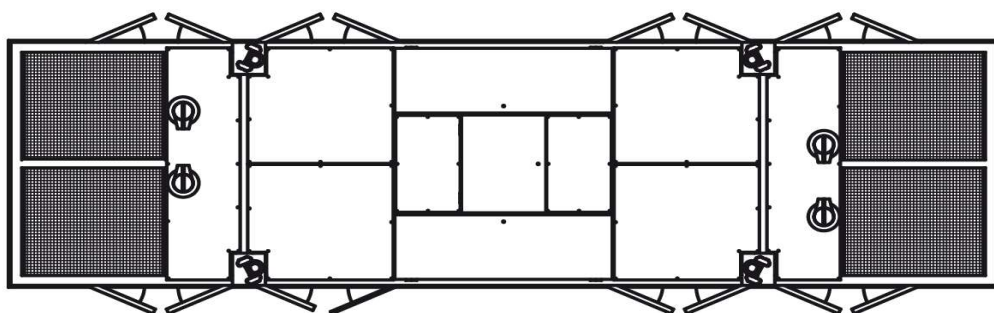

Especificaciones

PVE 3200 STAGE - / TIER 2

Motor de diesel	Volvo TAD 1643 VE (4x)	
Potencia Máxima teórica	2260/3072	kW/HP
Frecuencia máxima	1850	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Rexroth	
Flujo de aceite máximo	3330	L/min
Gasóleo	3970	L
Capacidad DEF (AdBlue)	N.A.	L
El aceite hidráulico	4900	L
Peso sin gasóleo	27800	kg
Peso	31000	kg






Specifications

PVE 3200 STAGE - / TIER 2

Hydraulic Power Pack

USA

Dimensions in inches

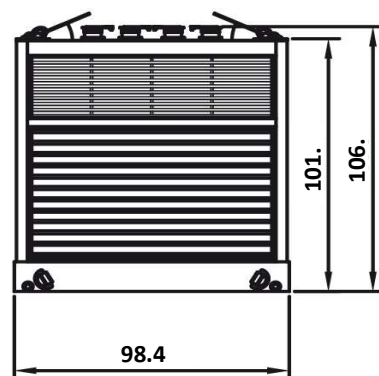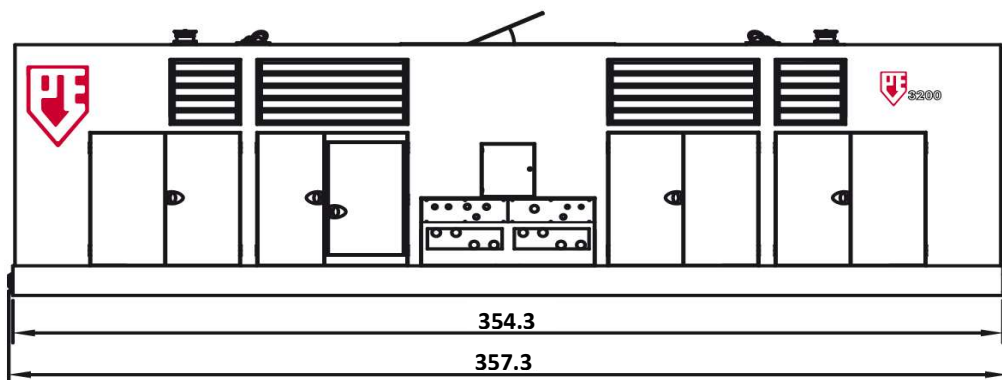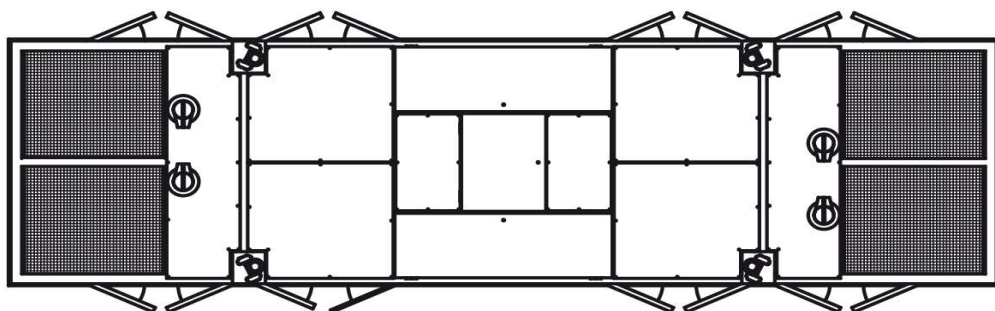

Specifications

PVE 3200 STAGE - / TIER 2

Diesel Engine	Volvo TAD 1643 VE (4x)	
Max. theoretical power	2,260/3,072	kW/HP
Max. frequency	1,850	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Rexroth	
Max. oil flow	880	gal/min
Diesel Fuel	1,049	gal
DEF (AdBlue) capacity	N.A.	gal
Hydraulic oil	1294	gal
Weight without fuel	61,289	lbs
Weight with fuel	68,343	lbs






Specificatii

PVE 3200 STAGE - / TIER 2

unitate de putere hidraulica

românesc

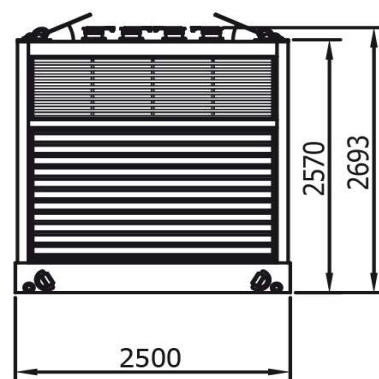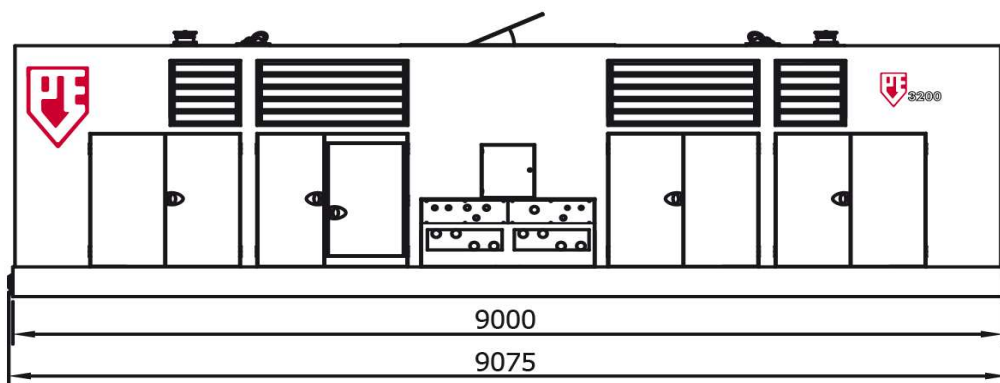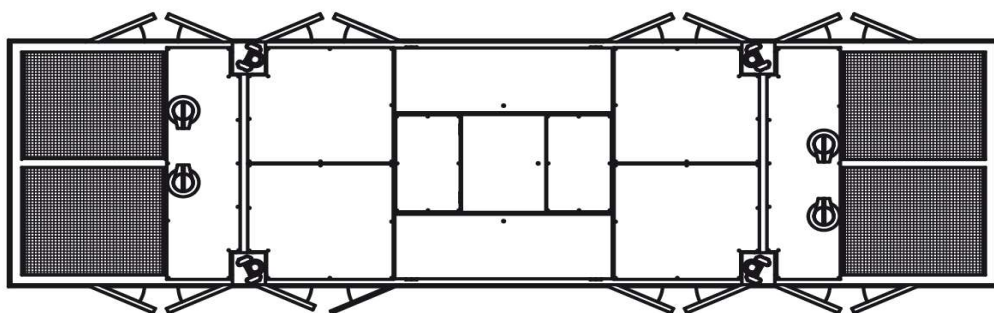

Specificatii :

PVE 3200 STAGE - / TIER 2

Motor diesel	Volvo TAD 1643 VE (4x)	
Puterea maxima teoretica	2260/3072	kW/HP
Frecventa maxima	1850	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Rexroth	
Debit maxim de ulei	3330	L/min
motorină	3970	L
Capacitate rezervor aditiv AdBlue	N.A.	L
Ulei hidraulic	4900	L
Greutatea fara combustibil	27800	kg
Greutatea cu combustibil	31000	kg