






Specification sheet

PVE 400 STAGE V / TIER 4F

Hydraulic Power Pack

English

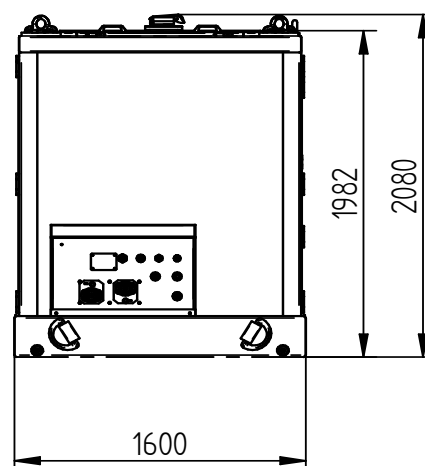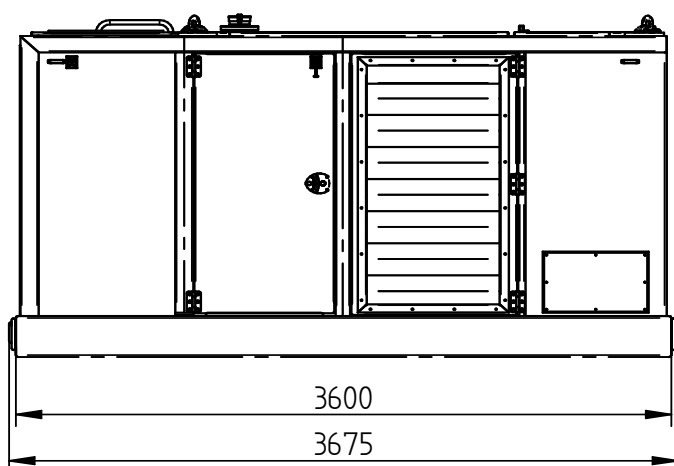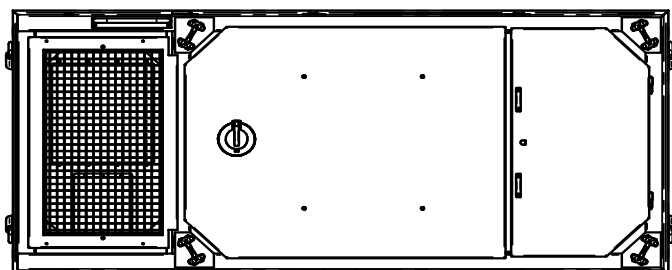

Specifications :

PVE 400 STAGE V / TIER 4F




Diesel Engine	Volvo TAD 884 VE	
Max. theoretical power	250/340	kW/HP
Max. frequency	2200	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	396	L/min
Diesel oil	530	L
DEF (AdBlue) capacity	25	L
Hydraulic oil	800	L
Weight without fuel	4700	kg
Weight filled up	5150	kg



Technische Daten PVE 400 STAGE V / TIER 4F

Aggregat

Deutsch

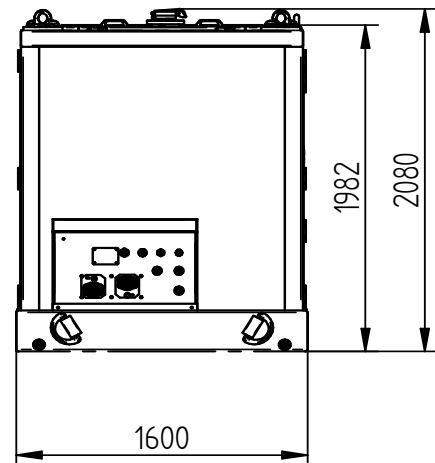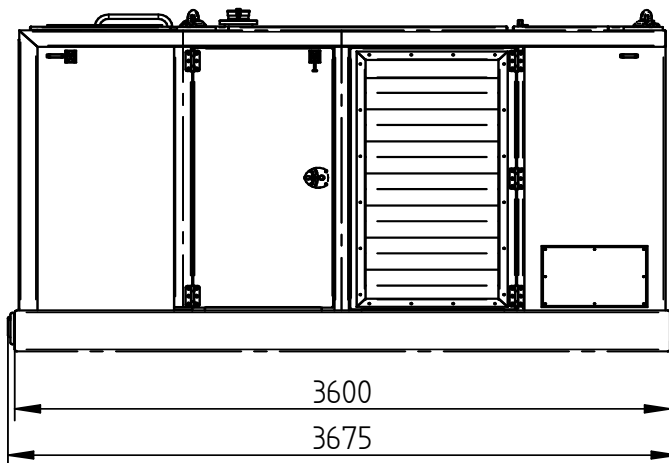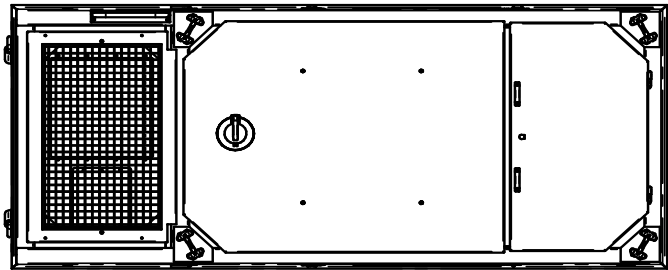

Technische Daten :

PVE 400 STAGE V / TIER 4F

Dieselmotor	Volvo TAD 884 VE	
Max. theoretische Leistung	250/340	kW/HP
Max. Drehzahl	2200	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	396	L/min
Diesel Öl	530	L
DAF (AdBlue) kapazität	25	L
Hydraulische Öl	800	L
Gewicht ohne Diesel Öl	4700	kg
Gewicht	5150	kg






Spécifications

PVE 400 STAGE V / TIER 4F

Groupe hydraulique

Français

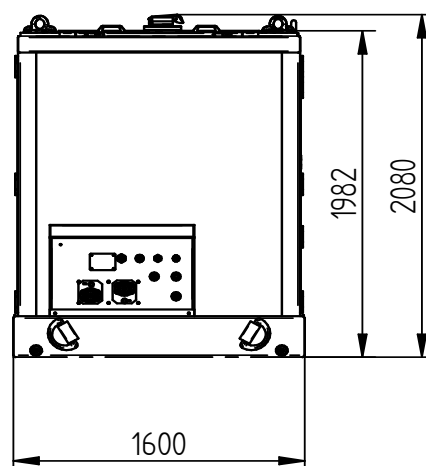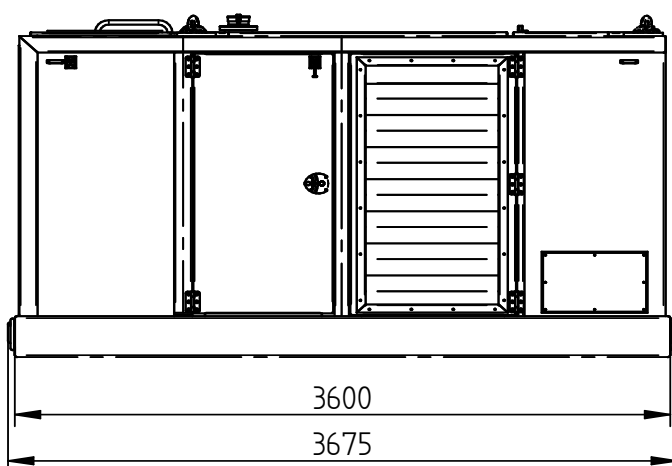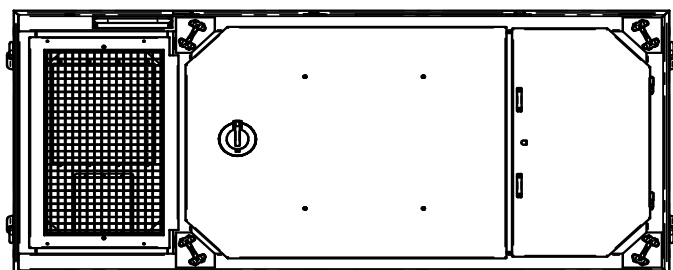

Spécifications

PVE 400 STAGE V / TIER 4F

Moteur Diesel	Volvo TAD 884 VE	
Puissance théorique max.	250/340	kW/HP
Max. fréquence	2200	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	396	L/min
Huile diesel	530	L
Capacité FED (AdBlue)	25	L
Huile hydraulique	800	L
Poids sans huile diesel	4700	kg
Poids	5150	kg






Specificaties

PVE 400 STAGE V / TIER 4F

Hydraulisch aggregaat

Nederlands

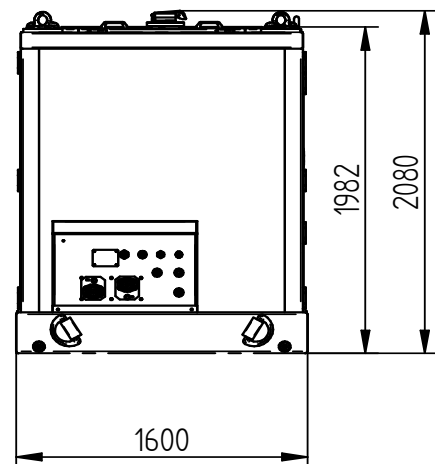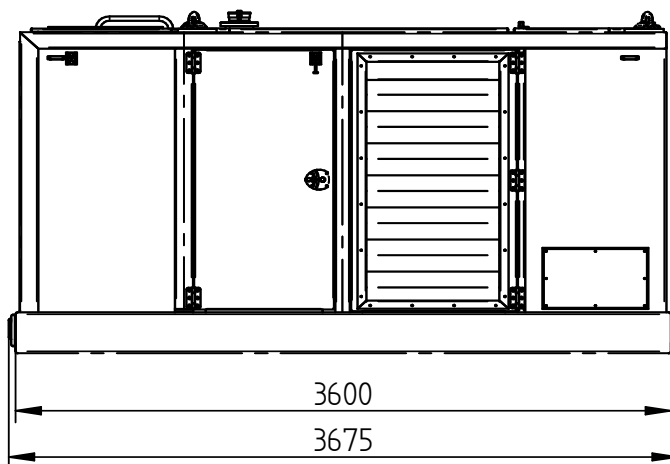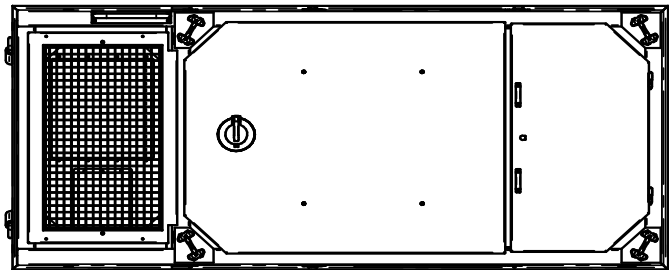

Specificaties

PVE 400 STAGE V / TIER 4F




Dieselmotor	Volvo TAD 884 VE	
Max. theoretisch vermogen	250/340	kW/HP
Max. toerental	2200	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	396	L/min
Diesel olie	530	L
DEF (AdBlue) capaciteit	25	L
Hydraulische olie	800	L
Gewicht zonder diesel	4700	kg
Gewicht	5150	kg



Especificaciones PVE 400 STAGE V / TIER 4F

Unidad de potencia

Español

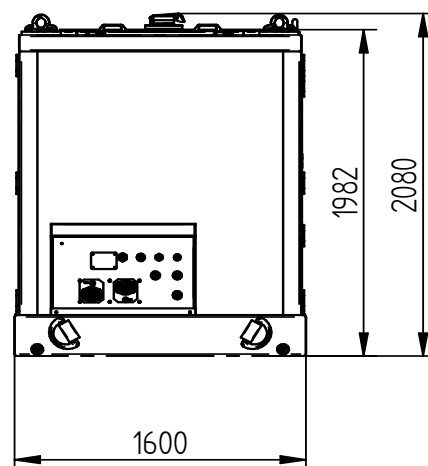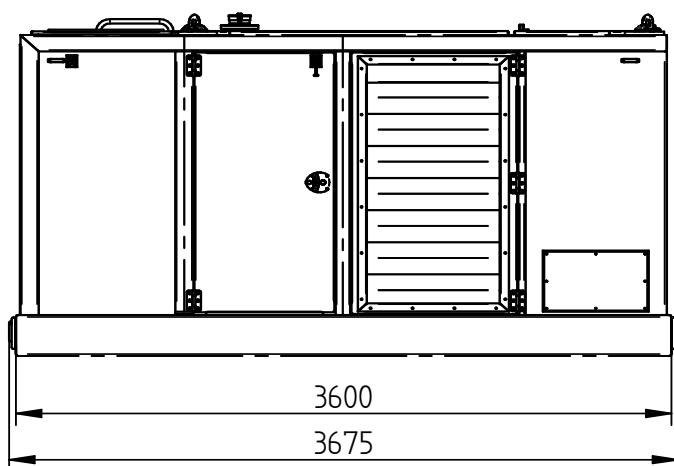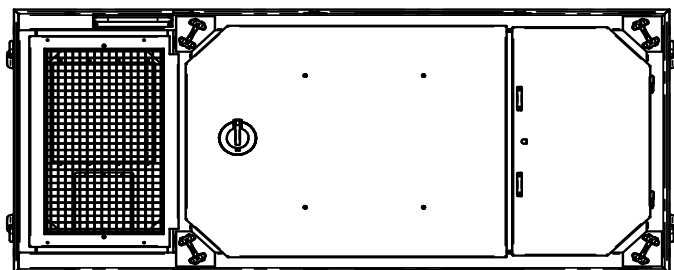

Especificaciones

PVE 400 STAGE V / TIER 4F

Motor de diesel	Volvo TAD 884 VE	
Potencia Máxima teórica	250/340	kW/HP
Frecuencia máxima	2200	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Parker	
Flujo de aceite máximo	396	L/min
Gasóleo	530	L
Capacidad DEF (AdBlue)	25	L
El aceite hidráulico	800	L
Peso sin gasóleo	4700	kg
Peso	5150	kg






Specifications

PVE 400 STAGE V / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

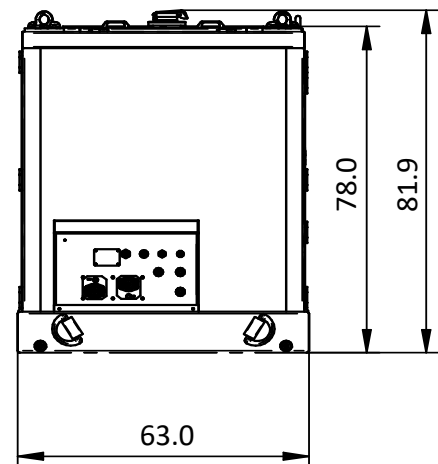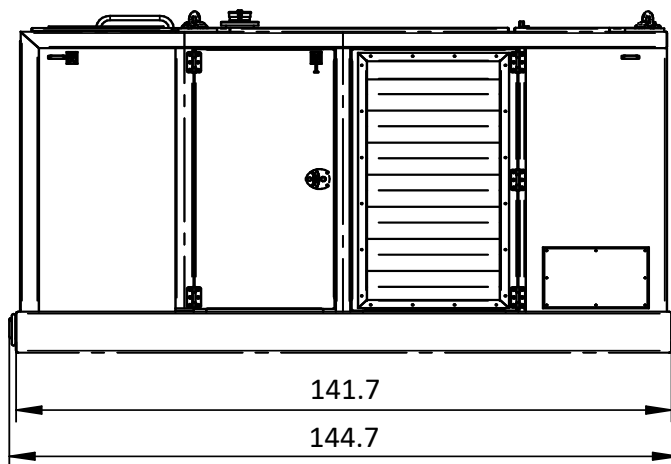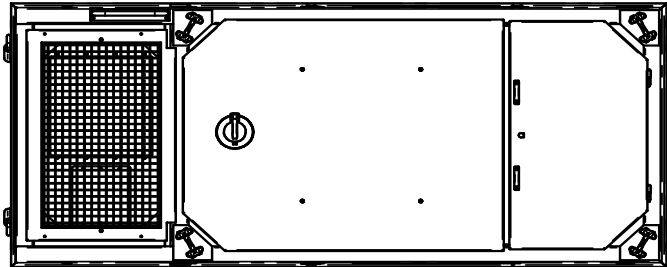

Specifications

PVE 400 STAGE V / TIER 4F

Diesel Engine	Volvo TAD 884 VE	
Max. theoretical power	250/340	kW/HP
Max. frequency	2,200	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Parker	
Max. oil flow	105	gal/min
Diesel Fuel	140	gal
DEF (AdBlue) capacity	7	gal
Hydraulic oil	211	gal
Weight without fuel	10,362	lbs
Weight with fuel	11,354	lbs






Specificatii

PVE 400 STAGE V / TIER 4F

unitate de putere hidraulica

românesc

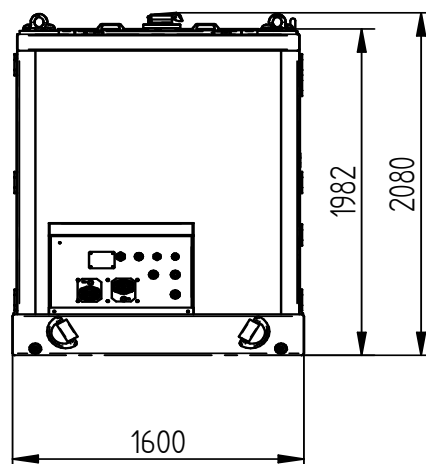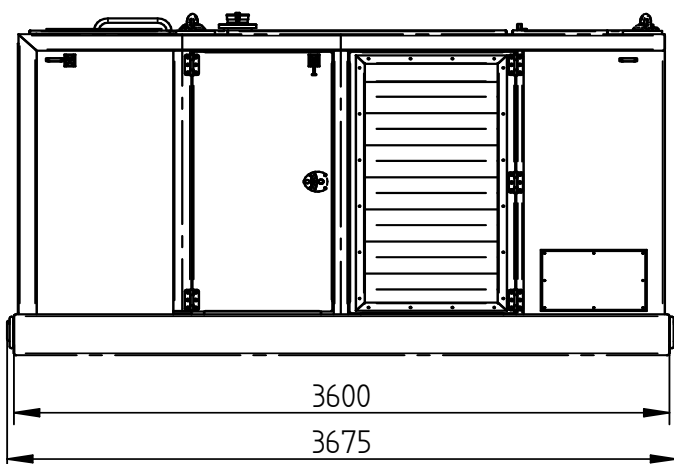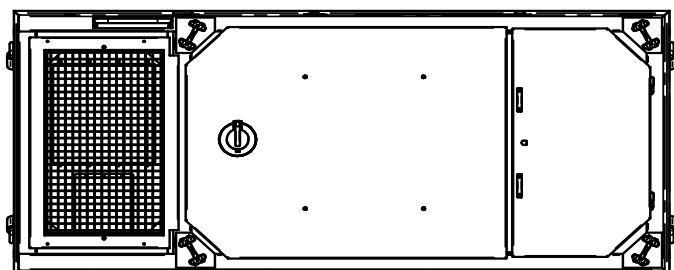**Specificatii :****PVE 400 STAGE V / TIER 4F**

Motor diesel	Volvo TAD 884 VE	
Puterea maxima teoretica	250/340	kW/HP
Frecventa maxima	2200	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit maxim de ulei	396	L/min
motorină	530	L
Capacitate rezervor aditiv AdBlue	25	L
Ulei hidraulic	800	L
Greutatea fara combustibil	4700	kg
Greutatea cu combustibil	5150	kg