






Specification sheet




PVE 600 TIER 3

Hydraulic Power Pack

English

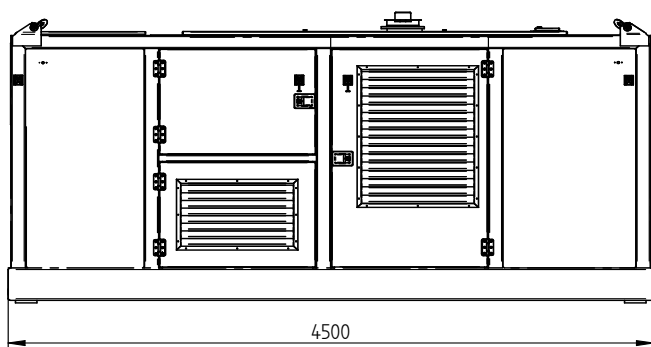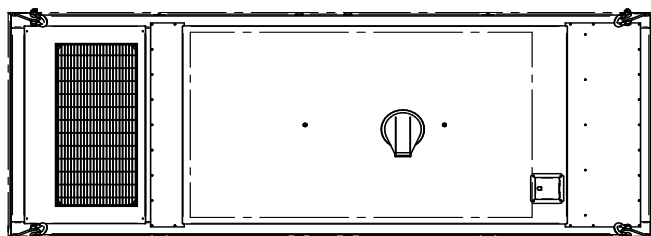**Specifications :****PVE 600 TIER 3**

Diesel Engine	CAT C15	
Max. theoretical power	403/540	kW/HP
Max. frequency	2100	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	672	L/min
Diesel oil	650	L
DEF (AdBlue) capacity	N.A.	L
Hydraulic oil	1200	L
Weight without fuel	7050	kg
Weight filled up	7600	kg

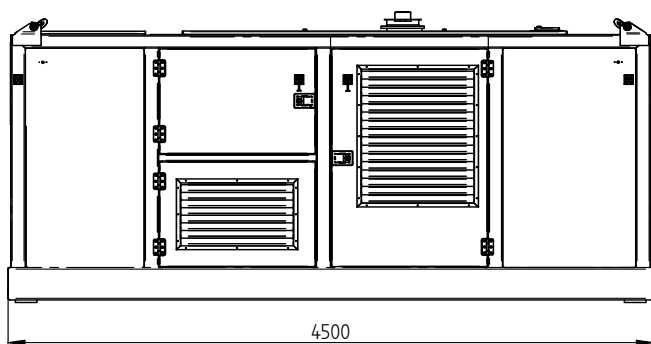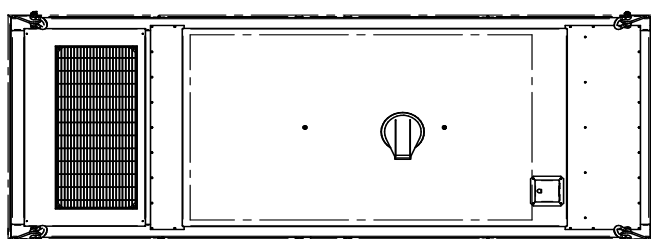

Technische Daten :

PVE 600 TIER 3




Dieselmotor	CAT C15	
Max. theoretische Leistung	403/540	kW/HP
Max. Drehzahl	2100	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	672	L/min
Diesel Öl	650	L
DAF (AdBlue) kapazität	N.A.	L
Hydraulische Öl	1200	L
Gewicht ohne Diesel Öl	7050	kg
Gewicht	7600	kg



Spécifications

PVE 600 TIER 3

Groupe hydraulique

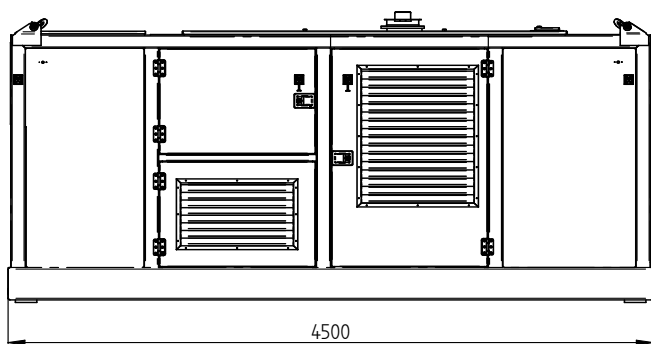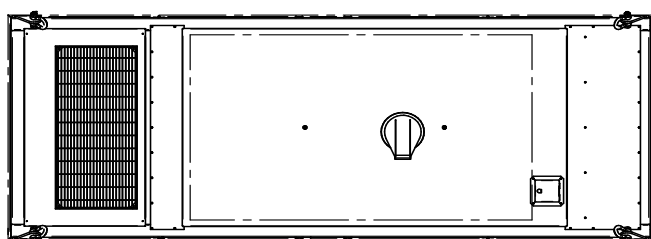

Spécifications

PVE 600 TIER 3

Moteur Diesel	CAT C15	
Puissance théorique max.	403/540	kW/HP
Max. fréquence	2100	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	672	L/min
Huile diesel	650	L
Capacité FED (AdBlue)	N.A.	L
Huile hydraulique	1200	L
Poids sans huile diesel	7050	kg
Poids	7600	kg






Specificaties

PVE 600 TIER 3

Hydraulisch aggregaat

Nederlands

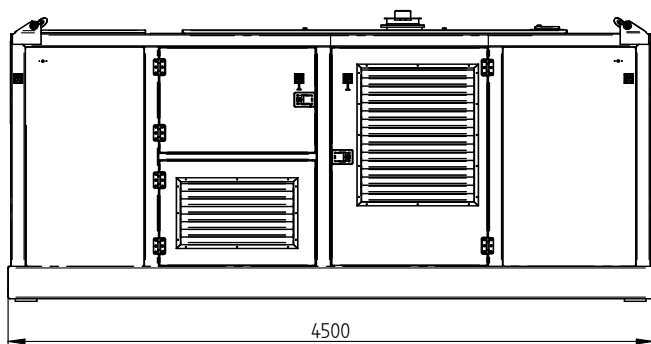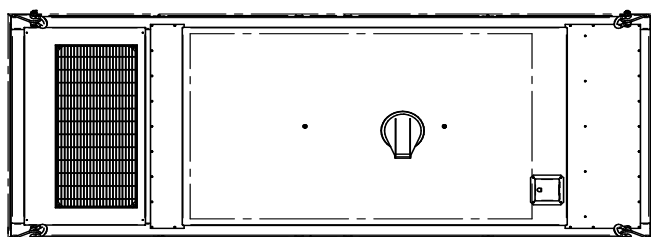

Specificaties

PVE 600 TIER 3

Dieselmotor	CAT C15	
Max. theoretisch vermogen	403/540	kW/HP
Max. toerental	2100	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	672	L/min
Diesel olie	650	L
DEF (AdBlue) capaciteit	N.A.	L
Hydraulische olie	1200	L
Gewicht zonder diesel	7050	kg
Gewicht	7600	kg






Especificaciones

PVE 600 TIER 3

Unidad de potencia

Español

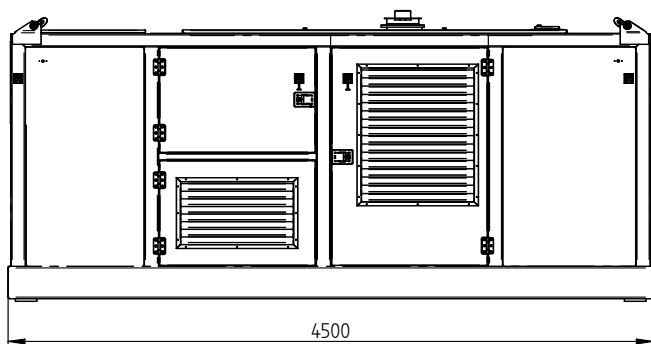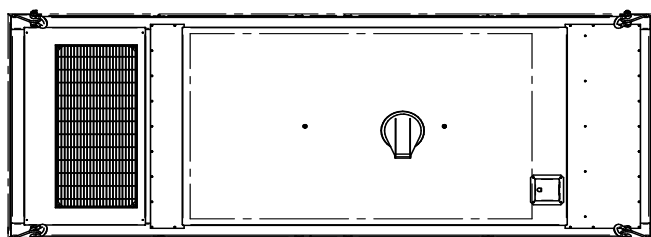

Especificaciones

PVE 600 TIER 3

Motor de diesel	CAT C15	
Potencia Máxima teórica	403/540	kW/HP
Frecuencia máxima	2100	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Parker	
Flujo de aceite máximo	672	L/min
Gasóleo	650	L
Capacidad DEF (AdBlue)	N.A.	L
El aceite hidráulico	1200	L
Peso sin gasóleo	7050	kg
Peso	7600	kg






Specifications

PVE 600 TIER 3

Hydraulic Power Pack

USA

Dimensions in inches

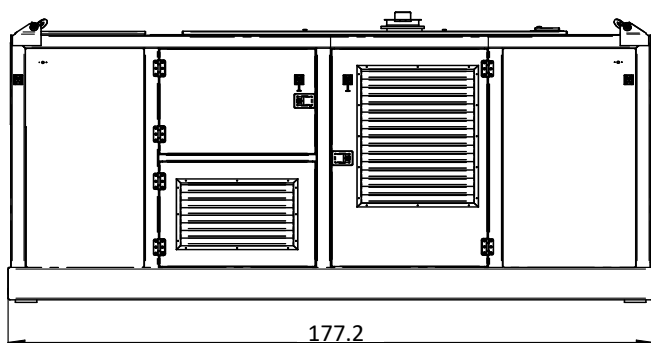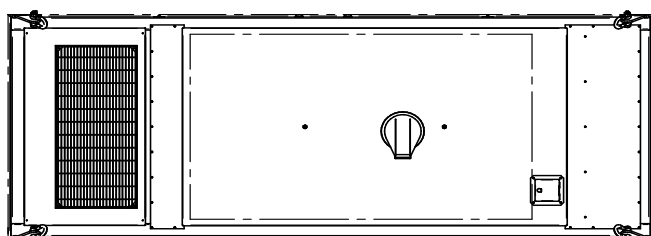

Specifications

PVE 600 TIER 3

Diesel Engine	CAT C15	
Max. theoretical power	403/540	kW/HP
Max. frequency	2,100	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Parker	
Max. oil flow	178	gal/min
Diesel Fuel	172	gal
DEF (AdBlue) capacity	N.A.	gal
Hydraulic oil	317	gal
Weight without fuel	15,543	lbs
Weight with fuel	16,755	lbs






Specificatii

PVE 600 TIER 3

unitate de putere hidraulica

românesc

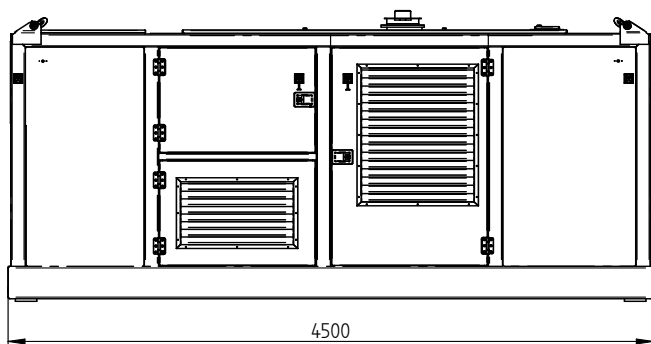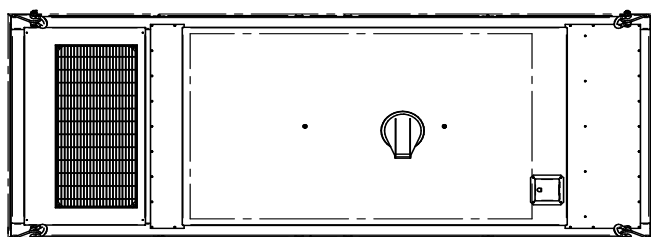

Specificatii :

PVE 600 TIER 3

Motor diesel	CAT C15	
Puterea maxima teoretica	403/540	kW/HP
Frecventa maxima	2100	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit maxim de ulei	672	L/min
motorină	650	L
Capacitate rezervor aditiv AdBlue	N.A.	L
Ulei hidraulic	1200	L
Greutatea fara combustibil	7050	kg
Greutatea cu combustibil	7600	kg