






Specification sheet

PVE 600 STAGE V / TIER 4F

Hydraulic Power Pack

English

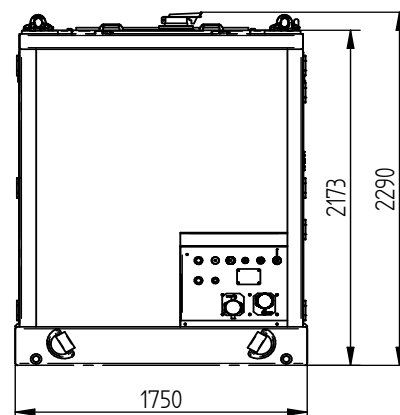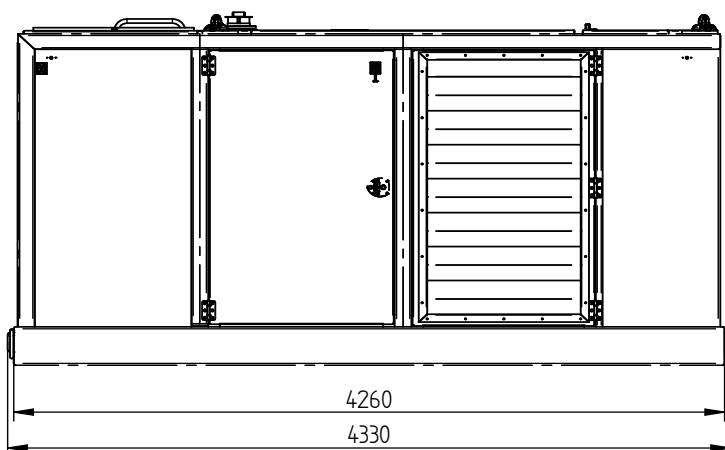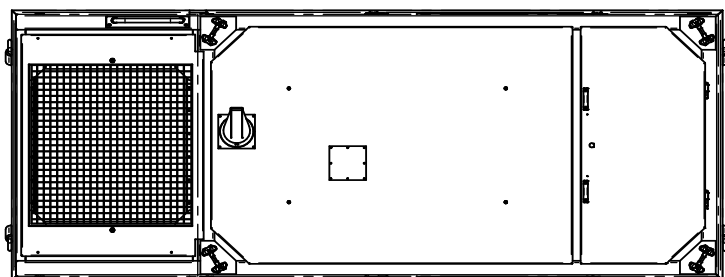

Specifications :

PVE 600 STAGE V / TIER 4F




Diesel Engine	Volvo TAD 1385 VE	
Max. theoretical power	405/551	kW/HP
Max. frequency	1900	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	644	L/min
Diesel oil	790	L
DEF (AdBlue) capacity	45	L
Hydraulic oil	1345	L
Weight without fuel	6900	kg
Weight filled up	7600	kg



Technische Daten PVE 600 STAGE V / TIER 4F

Aggregat

Deutsch

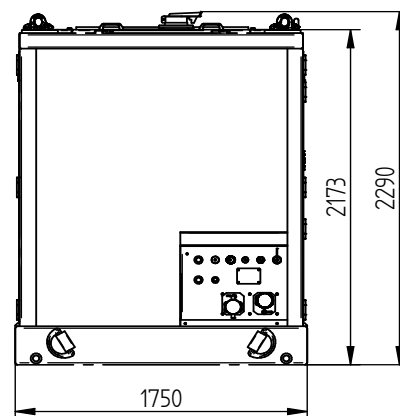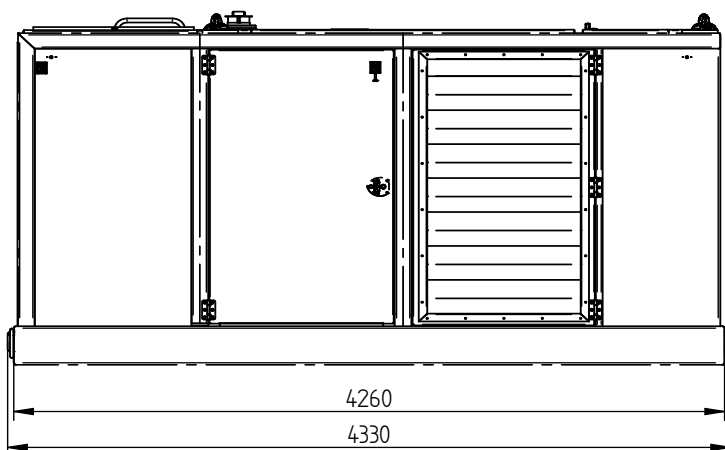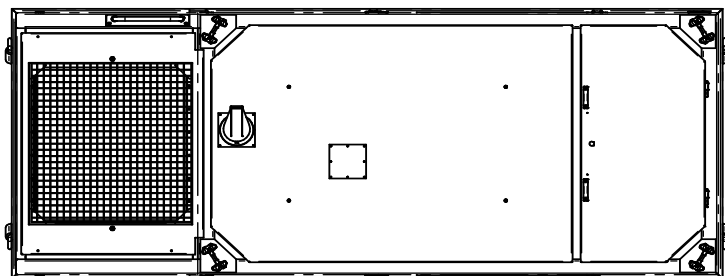

Technische Daten :

PVE 600 STAGE V / TIER 4F

Dieselmotor	Volvo TAD 1385 VE	
Max. theoretische Leistung	405/551	kW/HP
Max. Drehzahl	1900	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	644	L/min
Diesel Öl	790	L
DAF (AdBlue) kapazität	45	L
Hydraulische Öl	1345	L
Gewicht ohne Diesel Öl	6900	kg
Gewicht	7600	kg






Spécifications

PVE 600 STAGE V / TIER 4F

Groupe hydraulique

Français

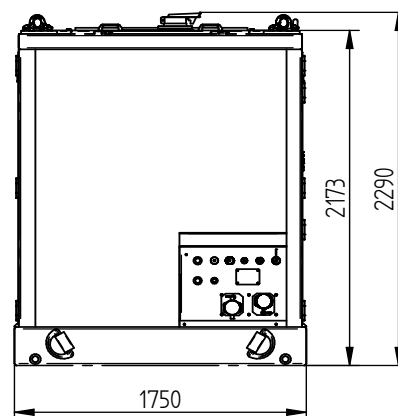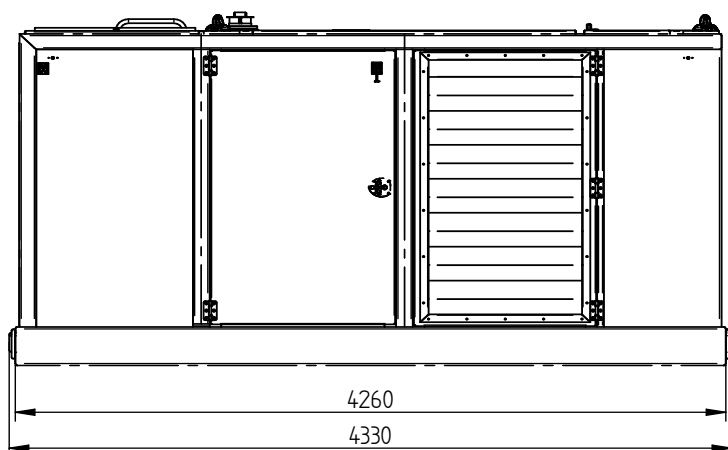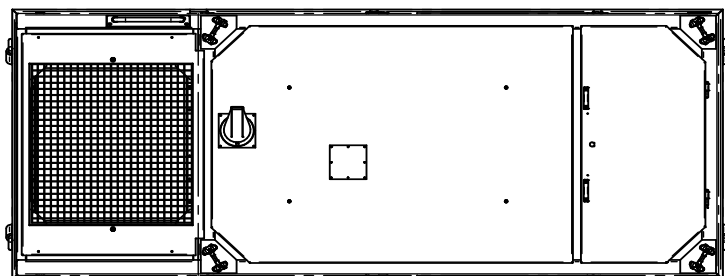

Spécifications

PVE 600 STAGE V / TIER 4F

Moteur Diesel	Volvo TAD 1385 VE	
Puissance théorique max.	405/551	kW/HP
Max. fréquence	1900	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	644	L/min
Huile diesel	790	L
Capacité FED (AdBlue)	45	L
Huile hydraulique	1345	L
Poids sans huile diesel	6900	kg
Poids	7600	kg






Specificaties

PVE 600 STAGE V / TIER 4F

Hydraulisch aggregaat

Nederlands

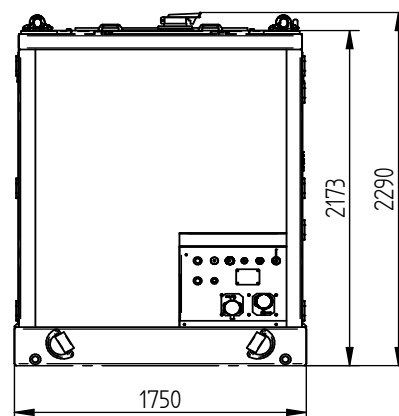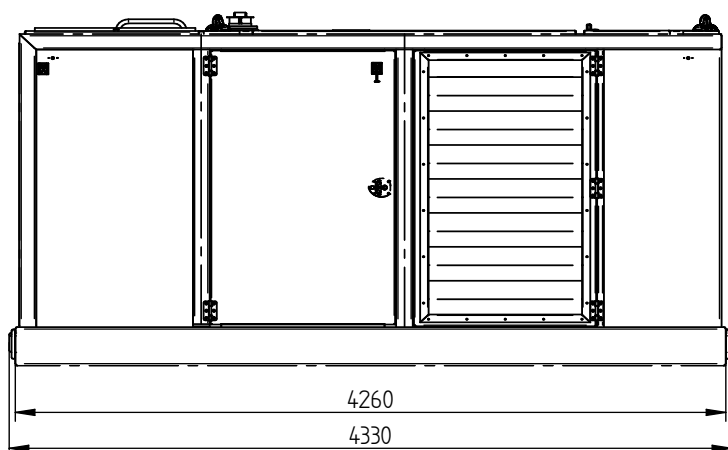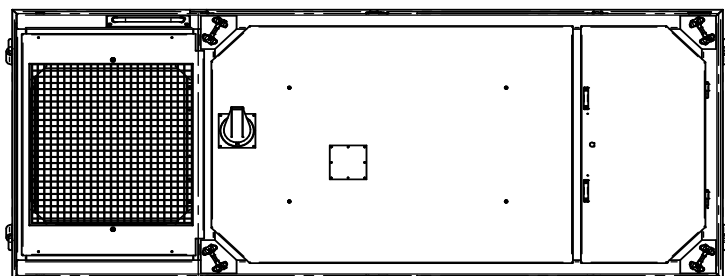

Specificaties

PVE 600 STAGE V / TIER 4F




Dieselmotor	Volvo TAD 1385 VE	
Max. theoretisch vermogen	405/551	kW/HP
Max. toerental	1900	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	644	L/min
Diesel olie	790	L
DEF (AdBlue) capaciteit	45	L
Hydraulische olie	1345	L
Gewicht zonder diesel	6900	kg
Gewicht	7600	kg



Especificaciones PVE 600 STAGE V / TIER 4F

Unidad de potencia

Español

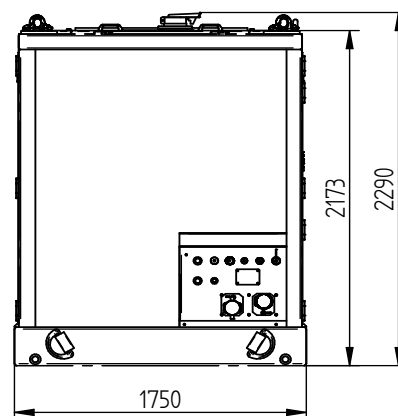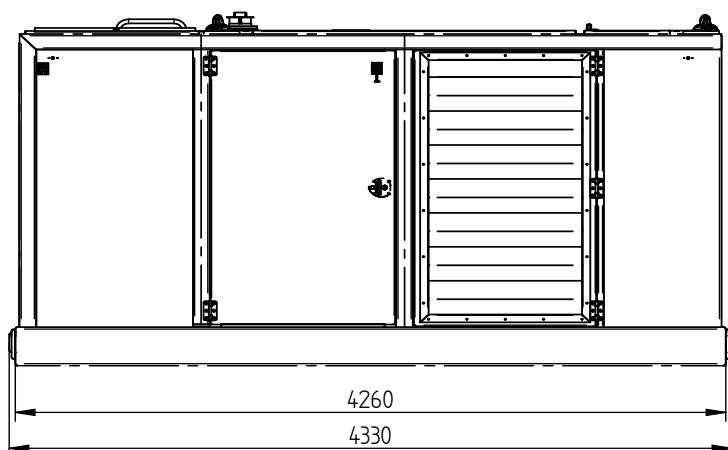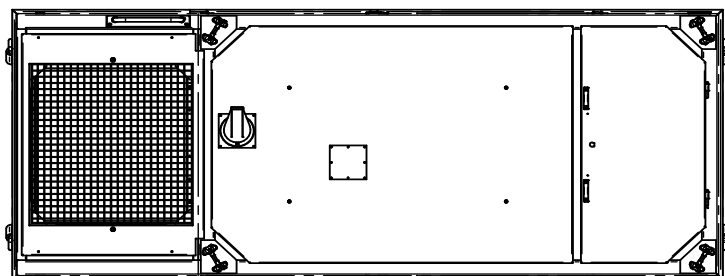

Especificaciones

PVE 600 STAGE V / TIER 4F

Motor de diesel	Volvo TAD 1385 VE	
Potencia Máxima teórica	405/551	kW/HP
Frecuencia máxima	1900	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Parker	
Flujo de aceite máximo	644	L/min
Gasóleo	790	L
Capacidad DEF (AdBlue)	45	L
El aceite hidráulico	1345	L
Peso sin gasóleo	6900	kg
Peso	7600	kg






Specifications

PVE 600 STAGE V / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

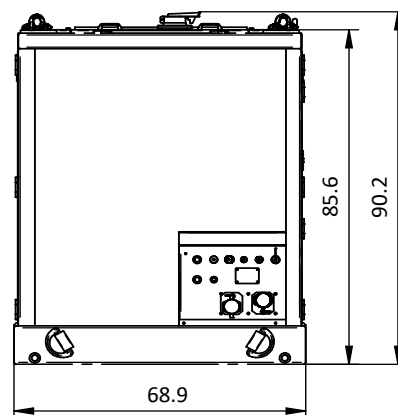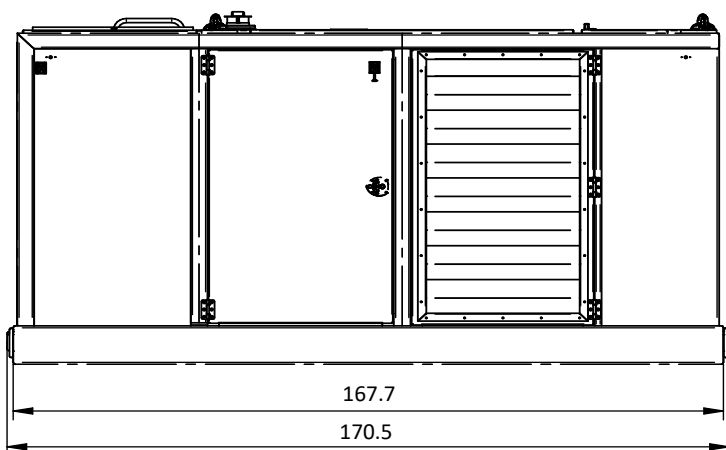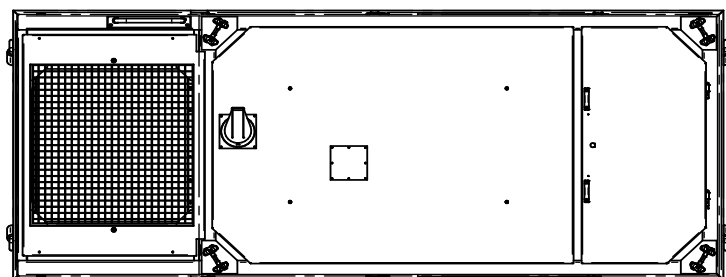

Specifications

PVE 600 STAGE V / TIER 4F

Diesel Engine	Volvo TAD 1385 VE	
Max. theoretical power	405/551	kW/HP
Max. frequency	1,900	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Parker	
Max. oil flow	170	gal/min
Diesel Fuel	209	gal
DEF (AdBlue) capacity	12	gal
Hydraulic oil	355	gal
Weight without fuel	15,212	lbs
Weight with fuel	16,755	lbs






Specificatii

PVE 600 STAGE V / TIER 4F

unitate de putere hidraulica

românesc

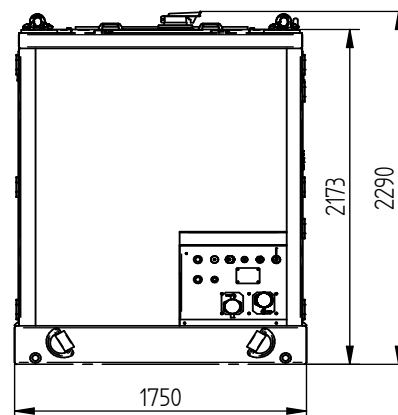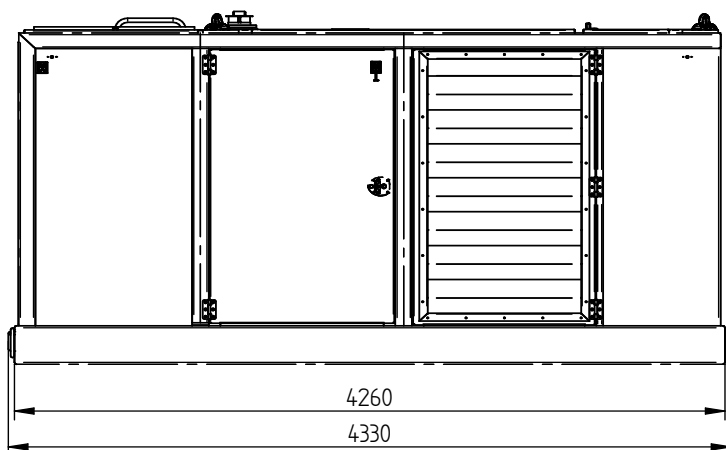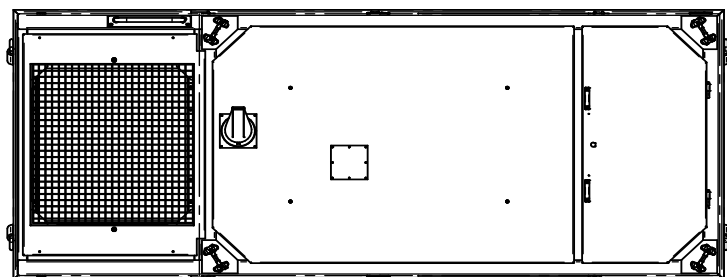**Specificatii :****PVE 600 STAGE V / TIER 4F**

Motor diesel	Volvo TAD 1385 VE	
Puterea maxima teoretica	405/551	kW/HP
Frecventa maxima	1900	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit maxim de ulei	644	L/min
motorină	790	L
Capacitate rezervor aditiv AdBlue	45	L
Ulei hidraulic	1345	L
Greutatea fara combustibil	6900	kg
Greutatea cu combustibil	7600	kg