





Specification sheet

PVE 900 STAGE V / TIER 4F

Hydraulic Power Pack

English

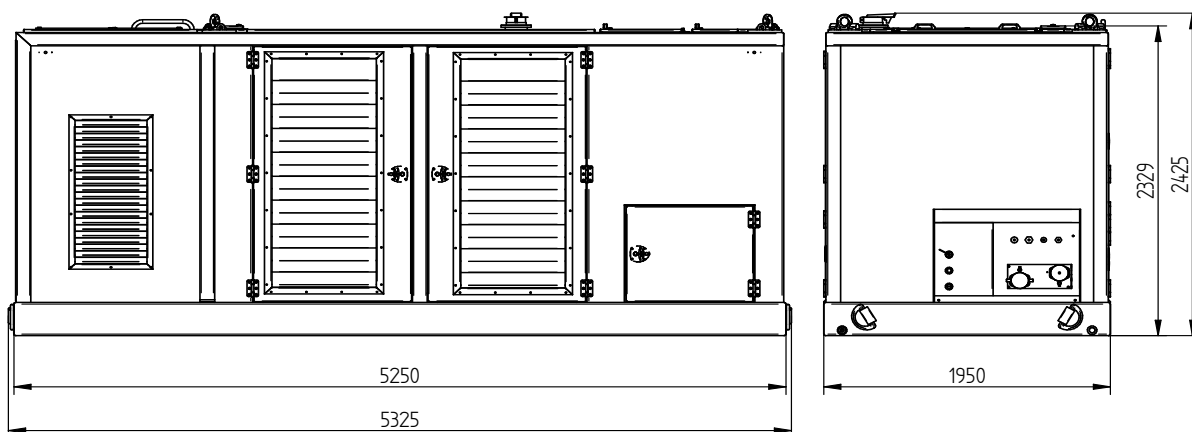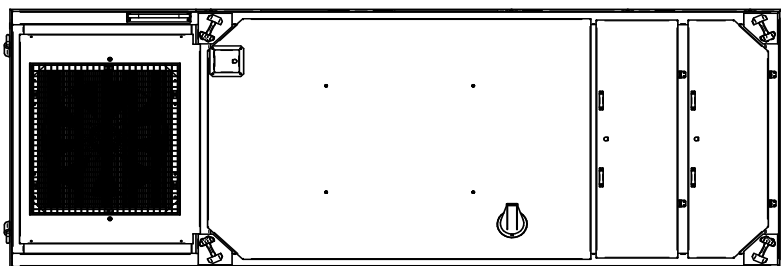

Specifications :

PVE 900 STAGE V / TIER 4F


Diesel Engine	CAT C18	
Max. theoretical power	563/755	kW/HP
Max. frequency	1800	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	972	L/min
Diesel oil	1100	L
DEF (AdBlue) capacity	N.A.	L
Hydraulic oil	2265	L
Weight without fuel	9700	kg
Weight filled up	10650	kg



Technische Daten PVE 900 STAGE V / TIER 4F

Aggregat

Deutsch

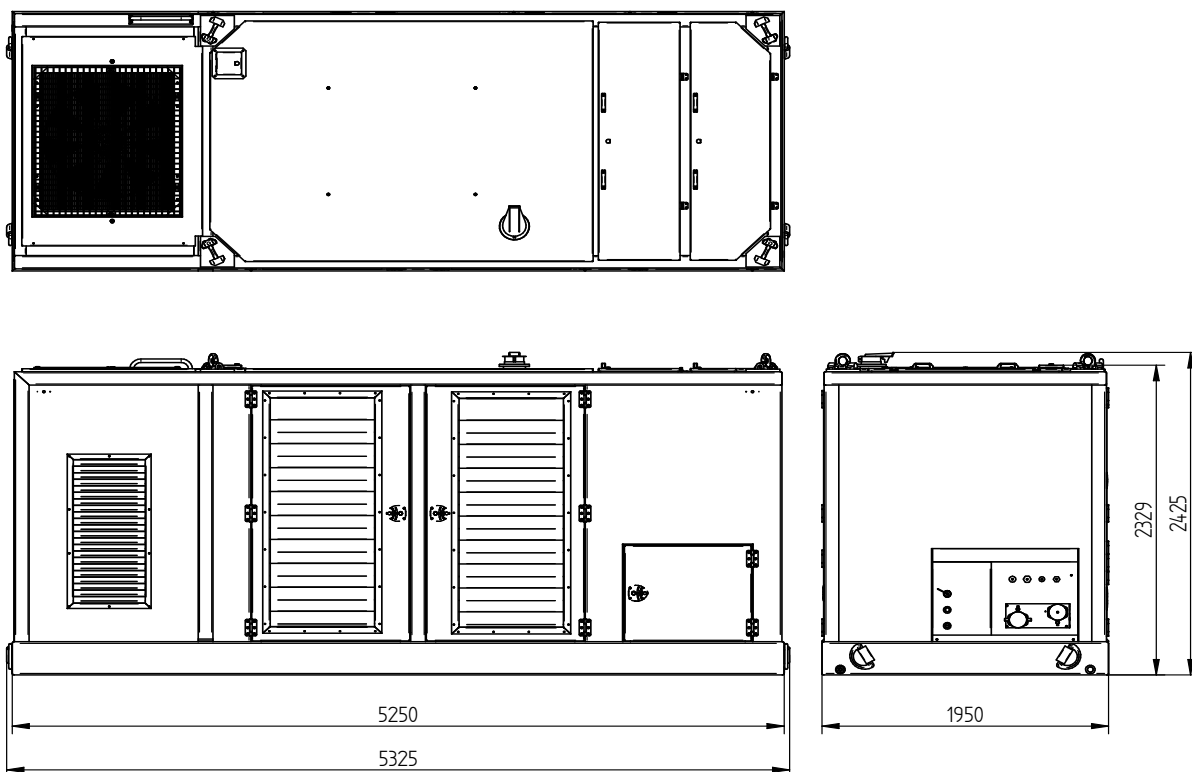**Technische Daten :****PVE 900 STAGE V / TIER 4F**

Dieselmotor	CAT C18	
Max. theoretische Leistung	563/755	kW/HP
Max. Drehzahl	1800	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	972	L/min
Diesel Öl	1100	L
DAF (AdBlue) kapazität	N.A.	L
Hydraulische Öl	2265	L
Gewicht ohne Diesel Öl	9700	kg
Gewicht	10650	kg




Spécifications

PVE 900 STAGE V / TIER 4F

Groupe hydraulique

Français

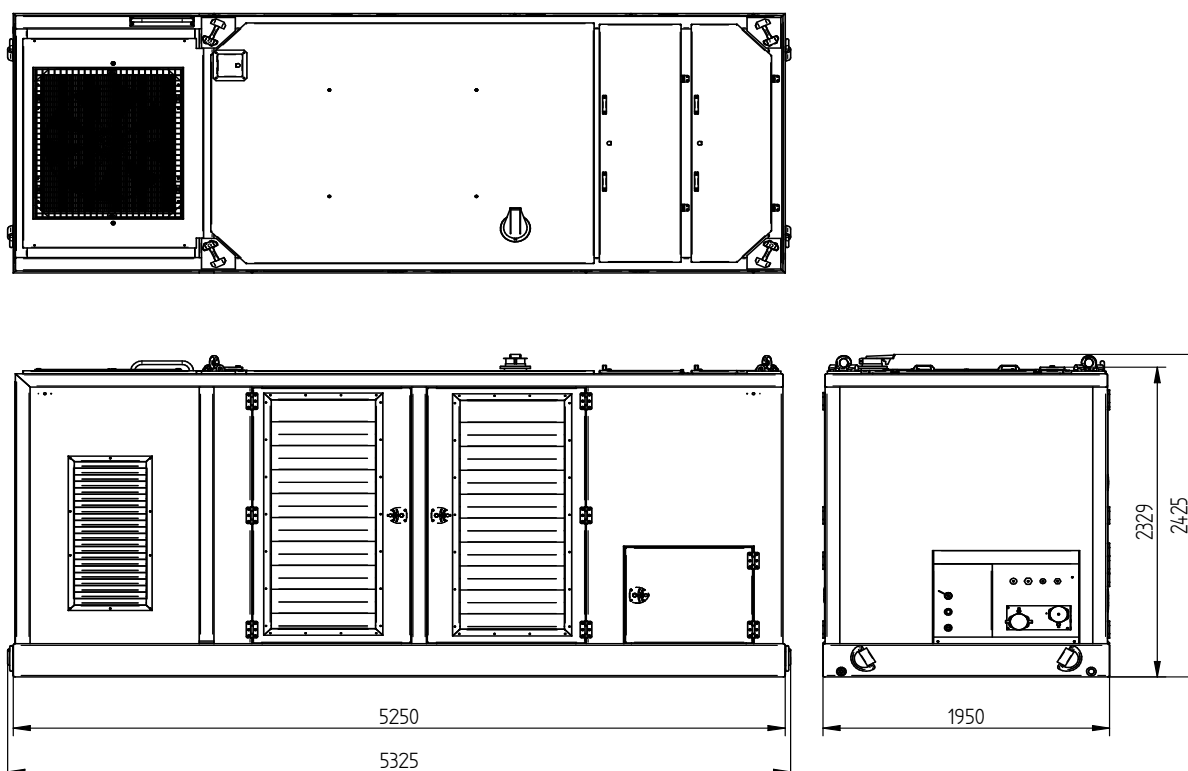

Spécifications

PVE 900 STAGE V / TIER 4F

Moteur Diesel	CAT C18	
Puissance théorique max.	563/755	kW/HP
Max. fréquence	1800	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	972	L/min
Huile diesel	1100	L
Capacité FED (AdBlue)	N.A.	L
Huile hydraulique	2265	L
Poids sans huile diesel	9700	kg
Poids	10650	kg




Specificaties

PVE 900 STAGE V / TIER 4F

Hydraulisch aggregaat

Nederlands

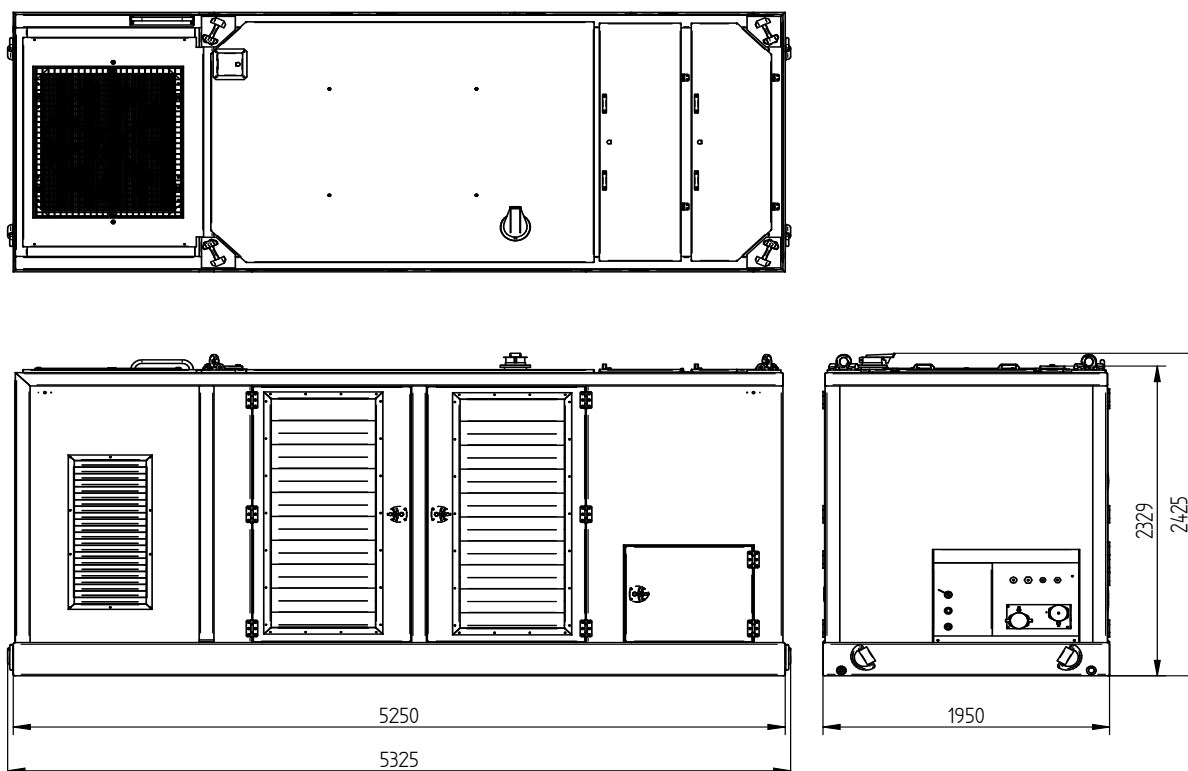

Specificaties

PVE 900 STAGE V / TIER 4F



Dieselmotor	CAT C18	
Max. theoretisch vermogen	563/755	kW/HP
Max. toerental	1800	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	972	L/min
Diesel olie	1100	L
DEF (AdBlue) capaciteit	N.A.	L
Hydraulische olie	2265	L
Gewicht zonder diesel	9700	kg
Gewicht	10650	kg



Especificaciones PVE 900 STAGE V / TIER 4F

Unidad de potencia

Español

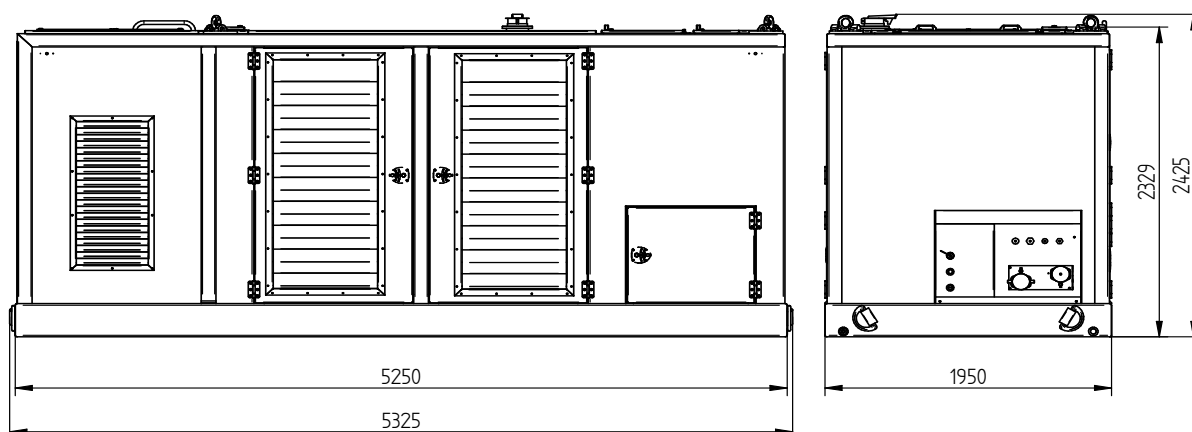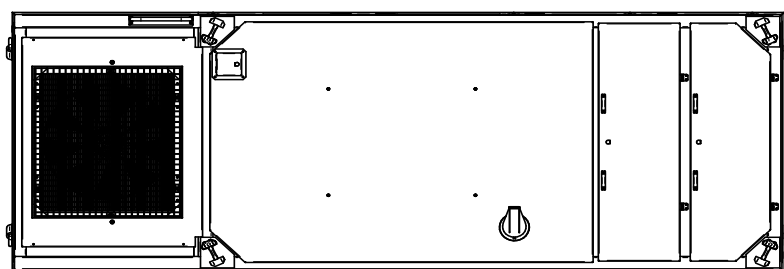

Especificaciones

PVE 900 STAGE V / TIER 4F

Motor de diesel	CAT C18	
Potencia Máxima teórica	563/755	kW/HP
Frecuencia máxima	1800	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Parker	
Flujo de aceite máximo	972	L/min
Gasóleo	1100	L
Capacidad DEF (AdBlue)	N.A.	L
El aceite hidráulico	2265	L
Peso sin gasóleo	9700	kg
Peso	10650	kg





Specifications

PVE 900 STAGE V / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

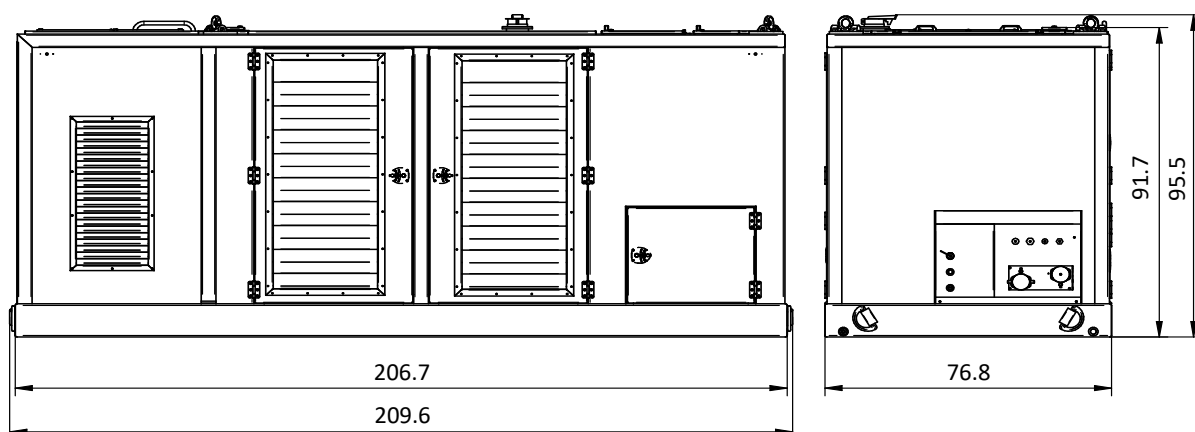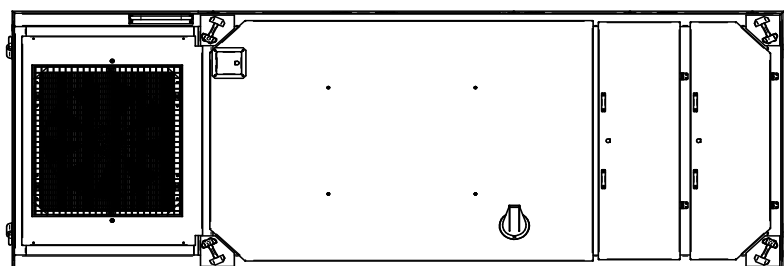

Specifications

PVE 900 STAGE V / TIER 4F

Diesel Engine	CAT C18	
Max. theoretical power	563/755	kW/HP
Max. frequency	1,800	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Parker	
Max. oil flow	257	gal/min
Diesel Fuel	291	gal
DEF (AdBlue) capacity	N.A.	gal
Hydraulic oil	598	gal
Weight without fuel	21,385	lbs
Weight with fuel	23,479	lbs





Specificatii

PVE 900 STAGE V / TIER 4F

unitate de putere hidraulica

românesc

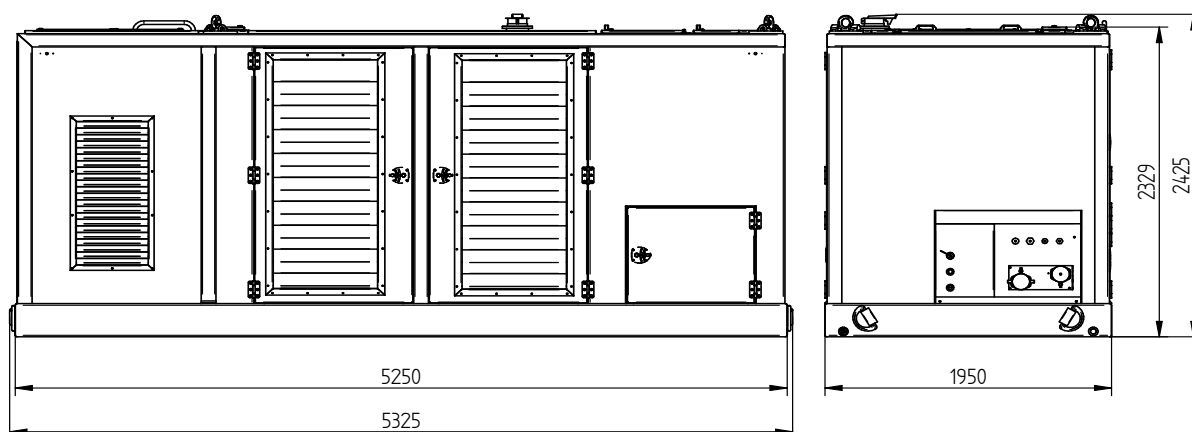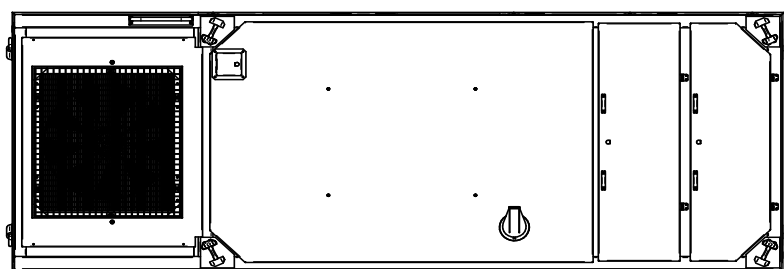**Specificatii :****PVE 900 STAGE V / TIER 4F**

Motor diesel	CAT C18	
Puterea maxima teoretica	563/755	kW/HP
Frecventa maxima	1800	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit maxim de ulei	972	L/min
motorină	1100	L
Capacitate rezervor aditiv AdBlue	N.A.	L
Ulei hidraulic	2265	L
Greutatea fara combustibil	9700	kg
Greutatea cu combustibil	10650	kg