Specification sheet

ICE 600 TIER 3

Hydraulic Power Pack

English

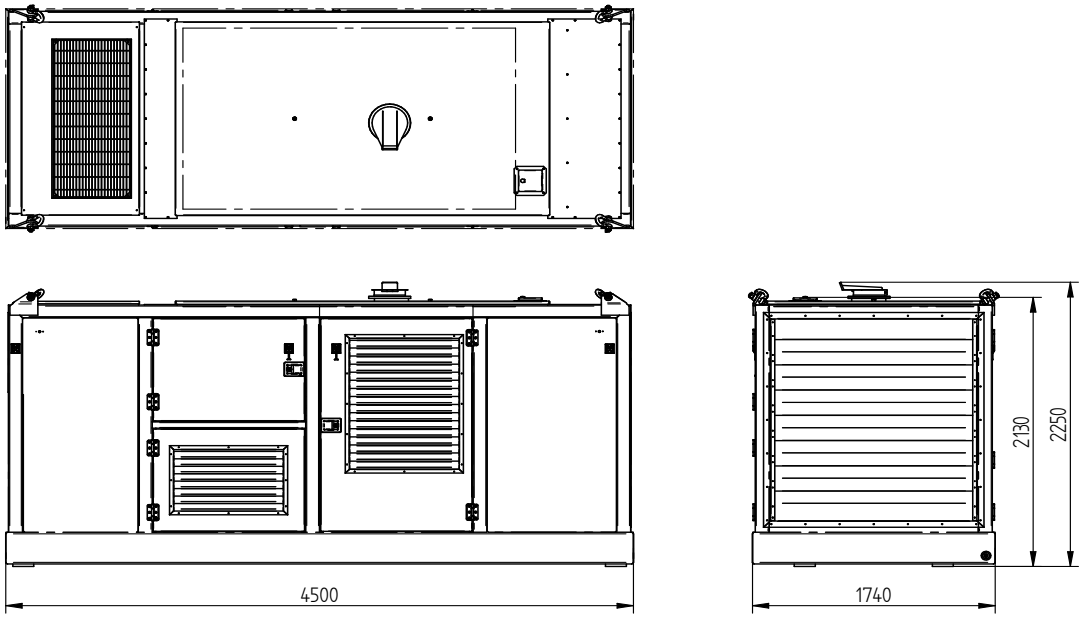

Specifications :	ICE 600 TIER 3	
Diesel Engine	Volvo TAD 1353 GE	
Max. theoretical power	410/558	kW/HP
Max. frequency	1800	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	648	L/min
Diesel oil	650	L
DEF (AdBlue) capacity	N.A.	L
Hydraulic oil	1200	L
Weight without fuel	6550	kg
Weight filled up	7100	kg

Dieseko group B.V. All rights reserved. No part of this publication may be reproduced and/or published in any manner whatsoever without prior written permission from Dieseko group B.V.

Technische Daten

ICE 600 TIER 3

Aggregat

Deutsch

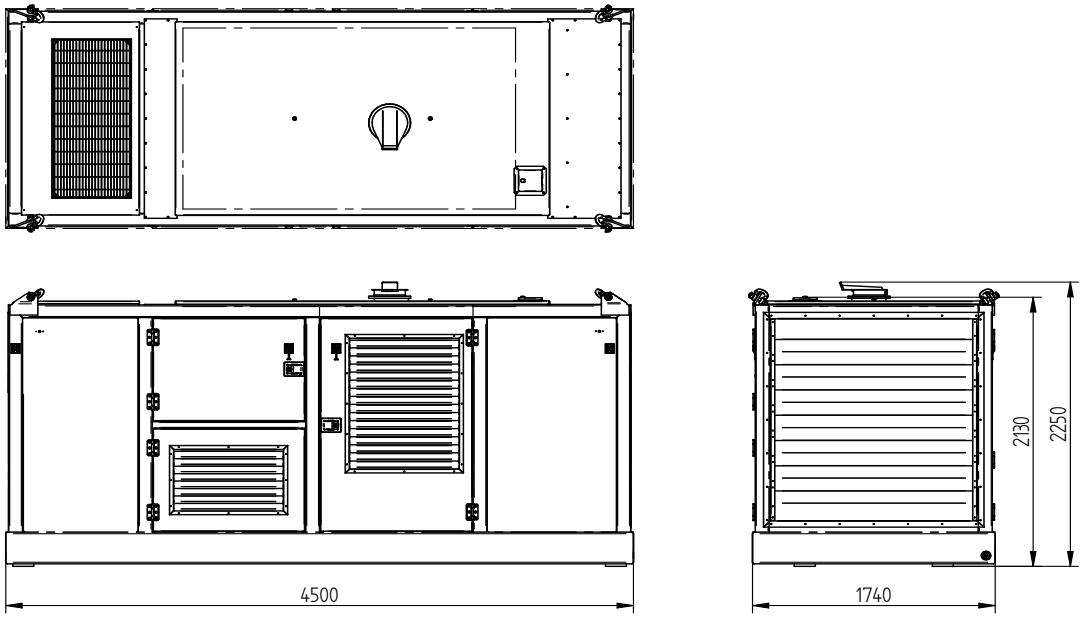

Technische Daten :	ICE 600 TIER 3	
Dieselmotor	Volvo TAD 1353 GE	
Max. theoretische Leistung	410/558	kW/HP
Max. Drehzahl	1800	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	648	L/min
Diesel Öl	650	L
DAF (AdBlue) kapazität	N.A.	L
Hydraulische Öl	1200	L
Gewicht ohne Diesel Öl	6550	kg
Gewicht	7100	kg

Dieseko group B.V. All rights reserved. No part of this publication may be reproduced and/or published in any manner whatsoever without prior written permission from Dieseko group B.V.

Spécifications

ICE 600 TIER 3

Groupe hydraulique

Français

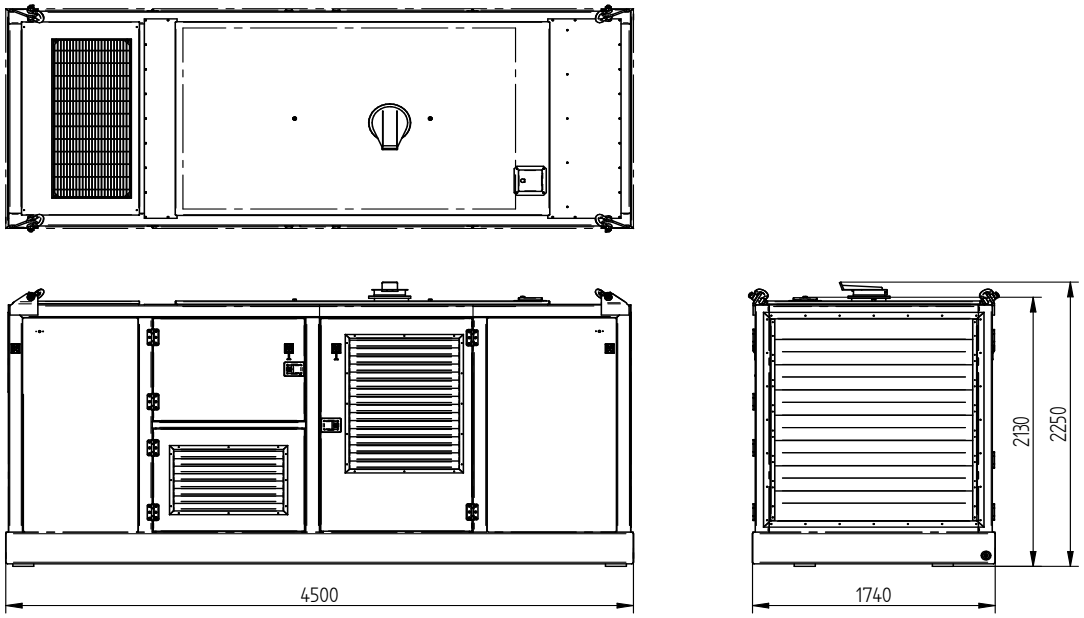

Spécifications	ICE 600 TIER 3	
Moteur Diesel	Volvo TAD 1353 GE	
Puissanse théorique max.	410/558	kW/HP
Max. fréquence	1800	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	648	L/min
Huile diesel	650	L
Capacité FED (AdBlue)	N.A.	L
Huile hydraulique	1200	L
Poids sans huile diesel	6550	kg
Poids	7100	kg

Dieseko group B.V. All rights reserved. No part of this publication may be reproduced and/or published in any manner whatsoever without prior written permission from Dieseko group B.V.

Specificaties

ICE 600 TIER 3

Hydraulisch aggregaat

Nederlands

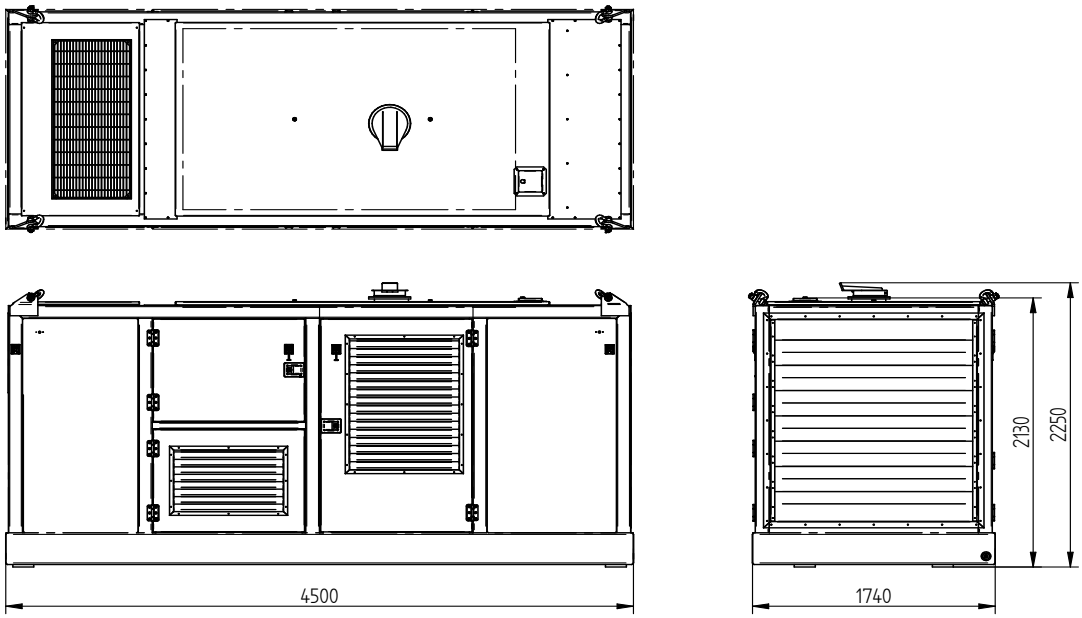

Specificaties	ICE 600 TIER 3	
Dieselmotor	Volvo TAD 1353 GE	
Max. theoretisch vermogen	410/558	kW/HP
Max. toerental	1800	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	648	L/min
Diesel olie	650	L
DEF (AdBlue) capaciteit	N.A.	L
Hydraulische olie	1200	L
Gewicht zonder diesel	6550	kg
Gewicht	7100	kg

Dieseko group B.V. All rights reserved. No part of this publication may be reproduced and/or published in any manner whatsoever without prior written permission from Dieseko group B.V.

Especificaciones

ICE 600 TIER 3

Unidat de potencia

Español

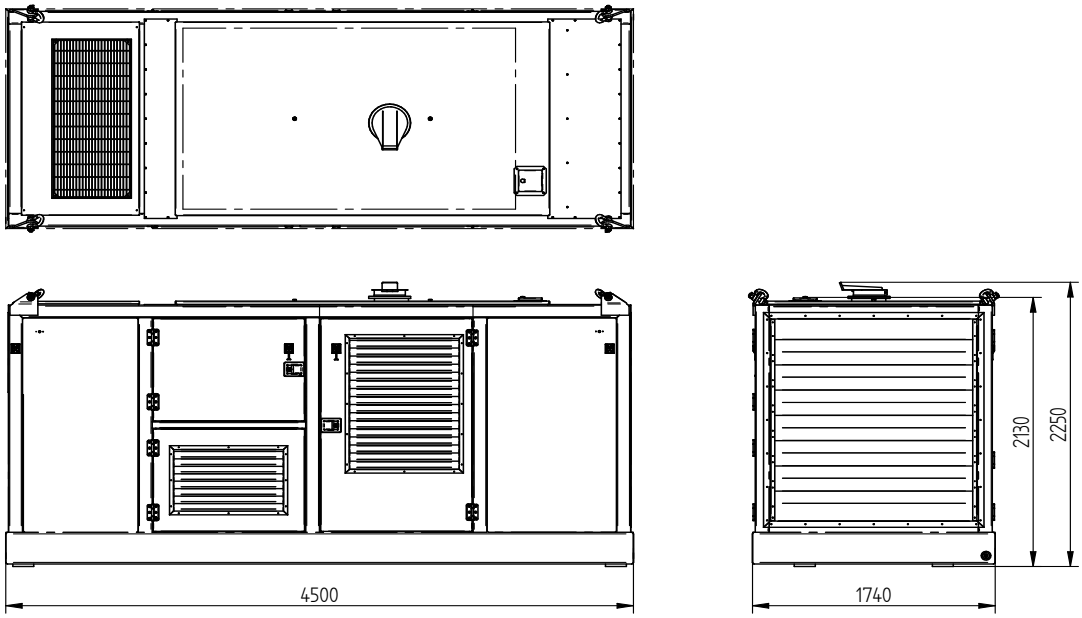

Especificaciones	ICE 600 TIER 3	
Motor de diesel	Volvo TAD 1353 GE	
Potencia Máxima teórica	410/558	kW/HP
Frecuencia máxima	1800	rpm
Presión máxima de trabajo	350	bar
Bomba hydráulica	Parker	
Flujo de aceite máximo	648	L/min
Gasóleo	650	L
Capacidad DEF (AdBlue)	N.A.	L
El aceite hidráulico	1200	L
Peso sin gasóleo	6550	kg
Peso	7100	kg

Dieseko group B.V. All rights reserved. No part of this publication may be reproduced and/or published in any manner whatsoever without prior written permission from Dieseko group B.V.

Specifications

ICE 600 TIER 3

Hydraulic Power Pack

USA

Dimensions in inches

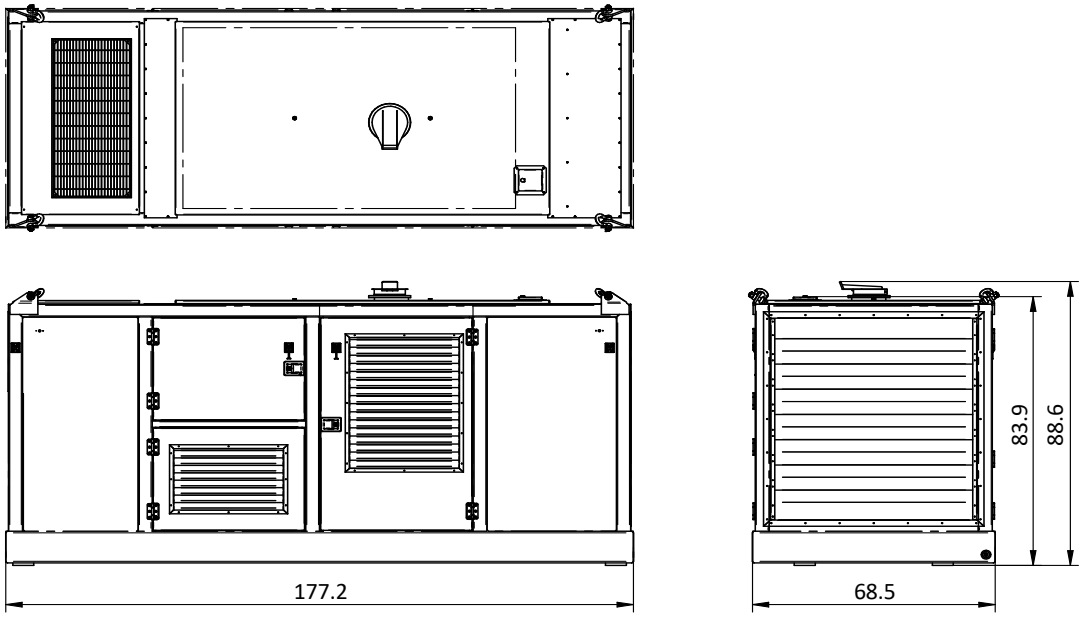

Specifications	ICE 600 TIER 3	
Diesel Engine	Volvo TAD 1353 GE	
Max. theoretical power	410/558	kW/HP
Max. frequency	1,800	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Parker	
Max. oil flow	171	gal/min
Diesel Fuel	172	gal
DEF (AdBlue) capacity	N.A.	gal
Hydraulic oil	317	gal
Weight without fuel	14,440	lbs
Weight with fuel	15,653	lbs

Dieseko group B.V. All rights reserved. No part of this publication may be reproduced and/or published in any manner whatsoever without prior written permission from Dieseko group B.V.

Specificatii

ICE 600 TIER 3

unitate de putere hidraulica

românesc

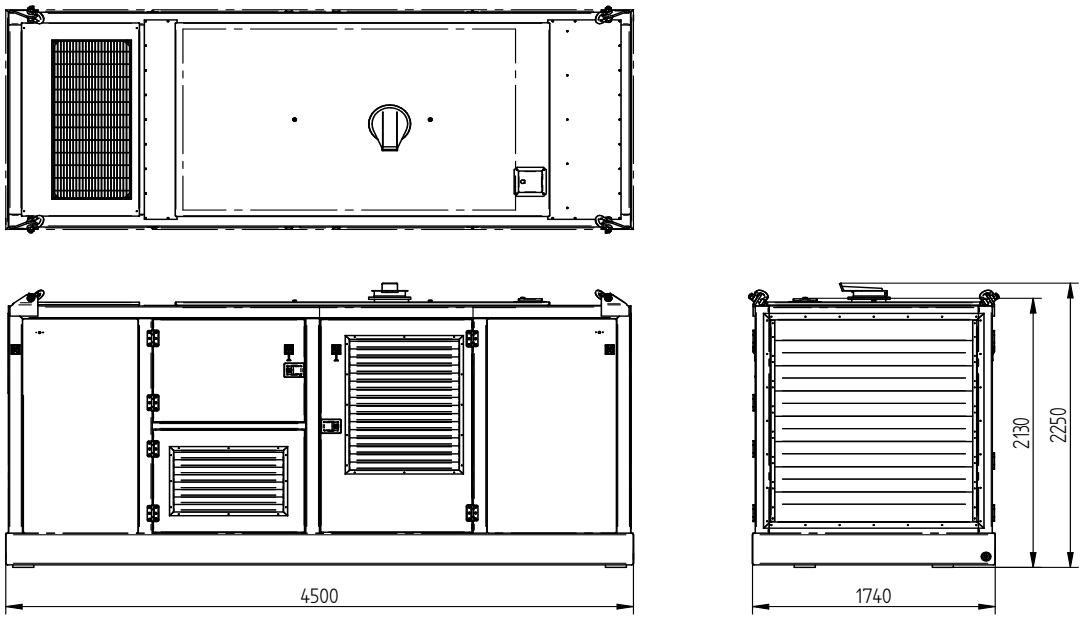

Specificatii :	ICE 600 TIER 3	
Motor diesel	Volvo TAD 1353 GE	
Puterea maxima teoretica	410/558	kW/HP
Frecventa maxima	1800	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit maxim de ulei	648	L/min
motorină	650	L
Capacitate rezervor aditiv AdBlue	N.A.	L
Ulei hidraulic	1200	L
Greutatea fara combustibil	6550	kg
Greutatea cu combustibil	7100	kg

Dieseko group B.V. All rights reserved. No part of this publication may be reproduced and/or published in any manner whatsoever without prior written permission from Dieseko group B.V.