
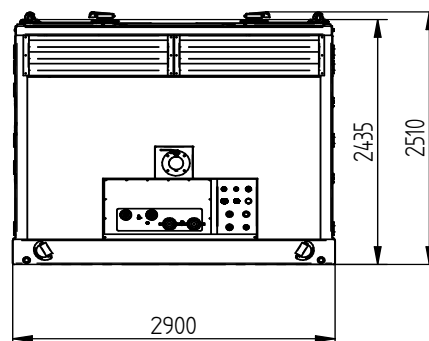
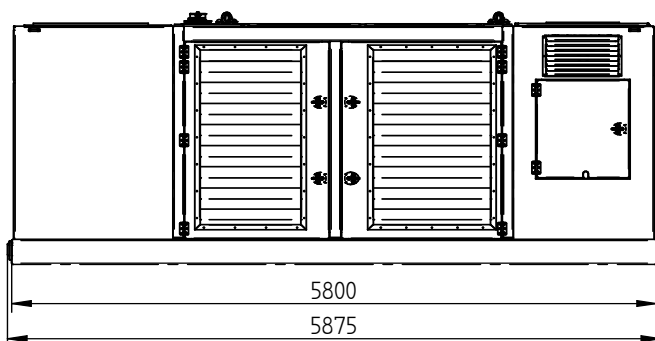


Specification sheet

ICE 1600 STAGE V / TIER 4F

Hydraulic Power Pack




English

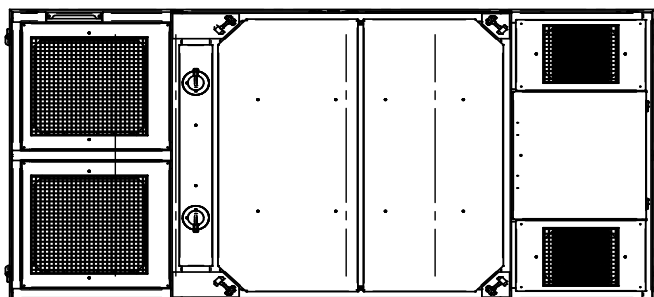

Specifications :

ICE 1600 STAGE V / TIER 4F

Diesel Engine	Volvo Penta TWD 1683 VE (2x)	
Max. theoretical power	1170/1592	kW/HP
Max. frequency	1900	rpm
Max. operating pressure	350	bar
Hydraulic pump	Rexroth	
Max. oil flow	1710	L/min
Diesel oil	2130	L
DEF (AdBlue) capacity	140	L
Hydraulic oil	3300	L
Weight without fuel	17100	kg
Weight filled up	18900	kg

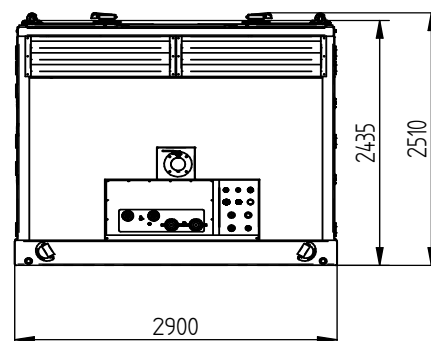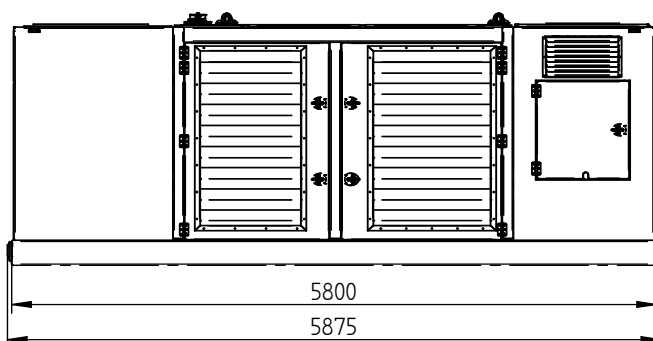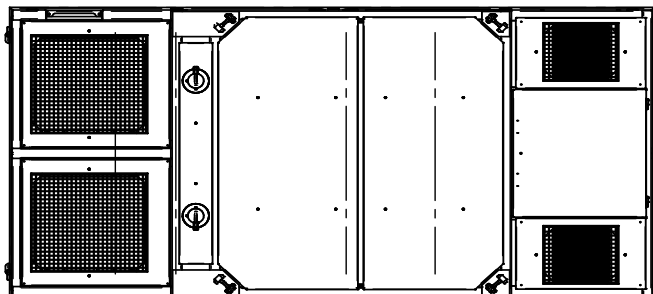

Technische Daten :

ICE 1600 STAGE V / TIER 4F




Dieselmotor	Volvo Penta TWD 1683 VE (2x)	
Max. theoretische Leistung	1170/1592	kW/HP
Max. Drehzahl	1900	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Rexroth	
Max. Fördermenge	1710	L/min
Diesel Öl	2130	L
DAF (AdBlue) kapazität	140	L
Hydraulische Öl	3300	L
Gewicht ohne Diesel Öl	17100	kg
Gewicht	18900	kg

Spécifications

ICE 1600 STAGE V / TIER 4F

Groupe hydraulique

Français

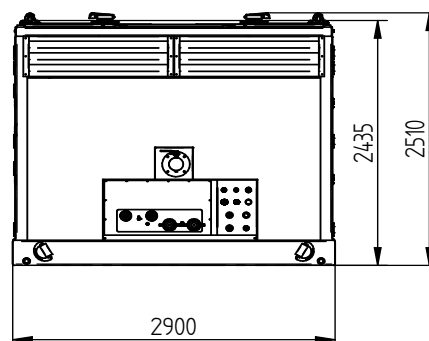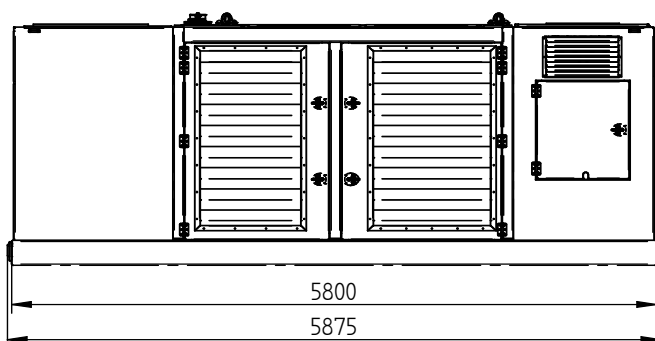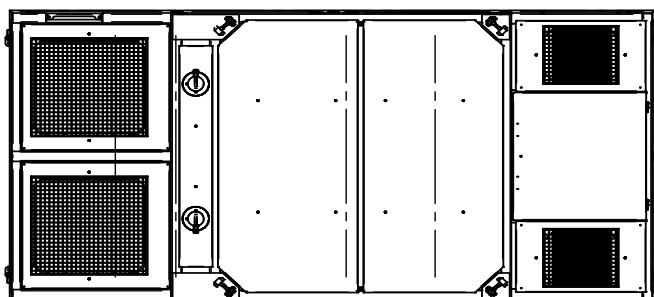

Spécifications

ICE 1600 STAGE V / TIER 4F




Moteur Diesel	Volvo Penta TWD 1683 VE (2x)	
Puissance théorique max.	1170/1592	kW/HP
Max. fréquence	1900	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Rexroth	
Débit d'huile max.	1710	L/min
Huile diesel	2130	L
Capacité FED (AdBlue)	140	L
Huile hydraulique	3300	L
Poids sans huile diesel	17100	kg
Poids	18900	kg

Specificaties

ICE 1600 STAGE V / TIER 4F

Hydraulisch aggregaat




Nederlands

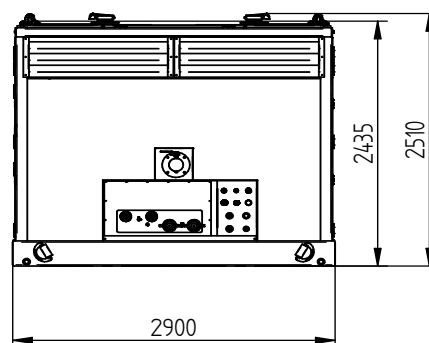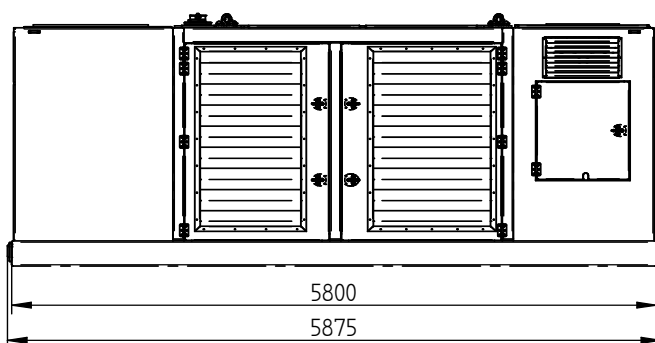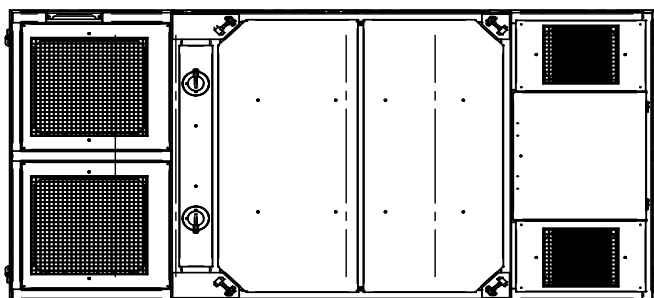

Specificaties

ICE 1600 STAGE V / TIER 4F

Dieselmotor	Volvo Penta TWD 1683 VE (2x)	
Max. theoretisch vermogen	1170/1592	kW/HP
Max. toerental	1900	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Rexroth	
Max. olie doorstroming	1710	L/min
Diesel olie	2130	L
DEF (AdBlue) capaciteit	140	L
Hydraulische olie	3300	L
Gewicht zonder diesel	17100	kg
Gewicht	18900	kg

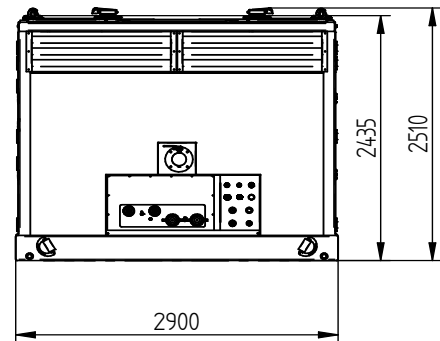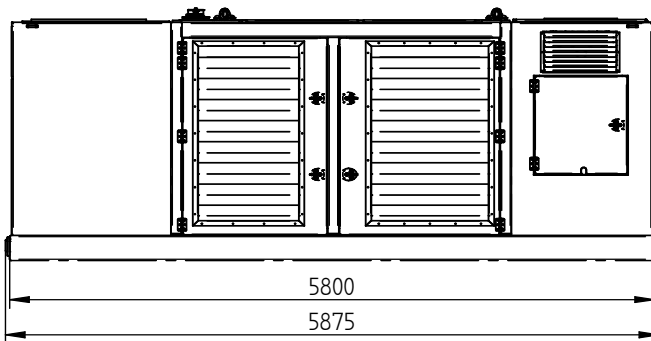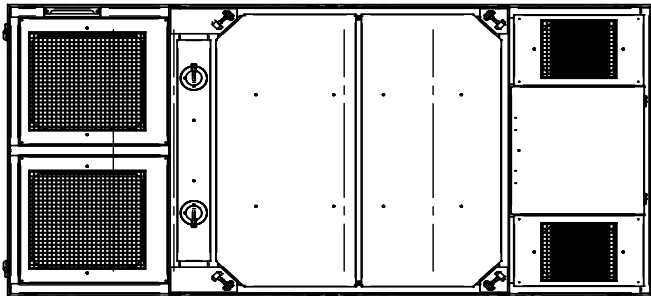

Especificaciones

ICE 1600 STAGE V / TIER 4F

Motor de diesel	Volvo Penta TWD 1683 VE (2x)	
Potencia Máxima teórica	1170/1592	kW/HP
Frecuencia máxima	1900	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Rexroth	
Flujo de aceite máximo	1710	L/min
Gasóleo	2130	L
Capacidad DEF (AdBlue)	140	L
El aceite hidráulico	3300	L
Peso sin gasóleo	17100	kg
Peso	18900	kg




Specifications

ICE 1600 STAGE V / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

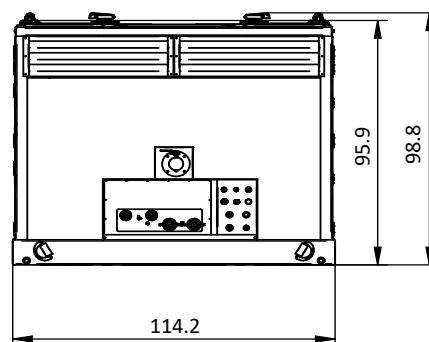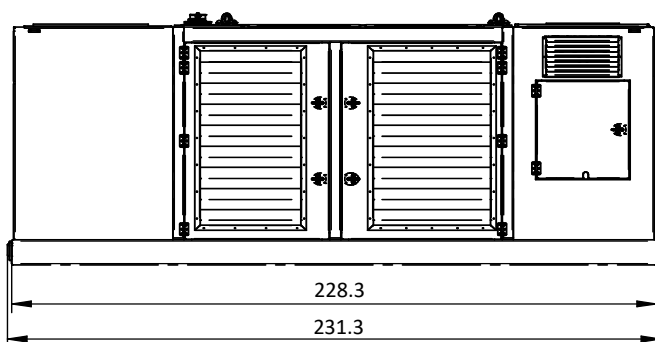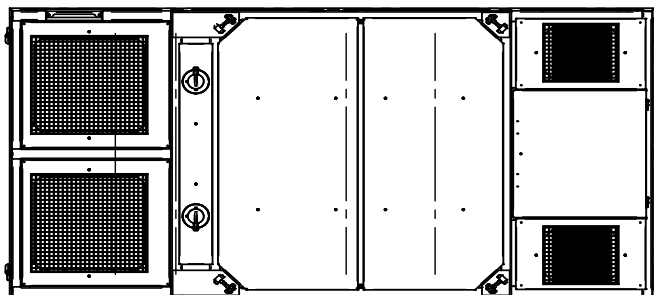

Specifications

ICE 1600 STAGE V / TIER 4F




Diesel Engine	Volvo Penta TWD 1683 VE (2x)	
Max. theoretical power	1,170/1,592	kW/HP
Max. frequency	1900,	rpm
Max. operating pressure	5076,3	psi
Hydraulic pump	Rexroth	
Max. oil flow	452	gal/min
Diesel Fuel	563	gal
DEF (AdBlue) capacity	37	gal
Hydraulic oil	872	gal
Weight without fuel	37699,	lbs
Weight with fuel	41667,4	lbs

Specificatii

ICE 1600 STAGE V / TIER 4F

unitate de putere hidraulica

românesc

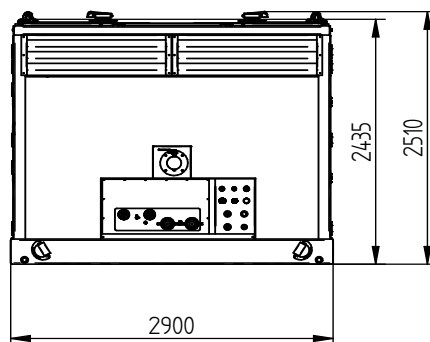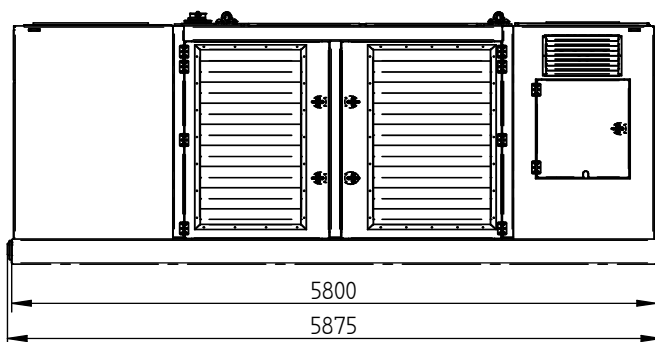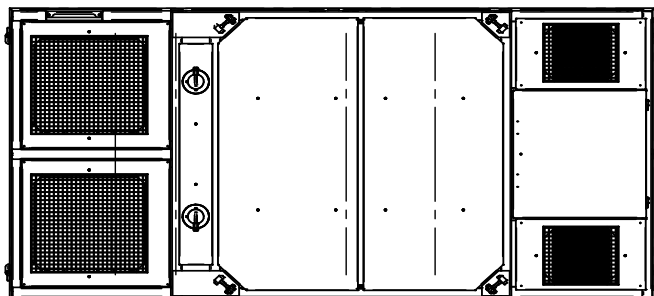

Specificatii :

ICE 1600 STAGE V / TIER 4F

Motor diesel	Volvo Penta TWD 1683 VE (2x)	
Puterea maxima teoretica	1170/1592	kW/HP
Frecventa maxima	1900	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Rexroth	
Debit maxim de ulei	1710	L/min
motorină	2130	L
Capacitate rezervor aditiv AdBlue	140	L
Ulei hidraulic	3300	L
Greutatea fara combustibil	17100	kg
Greutatea cu combustibil	18900	kg