






Specification sheet

PVE 900 STAGE V / TIER 4F

Hydraulic Power Pack

English

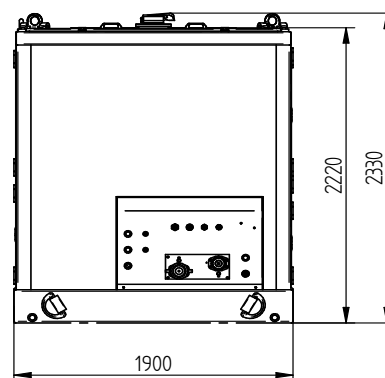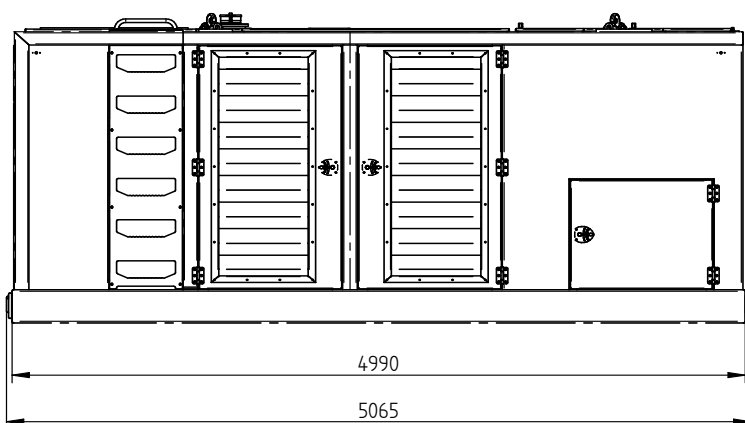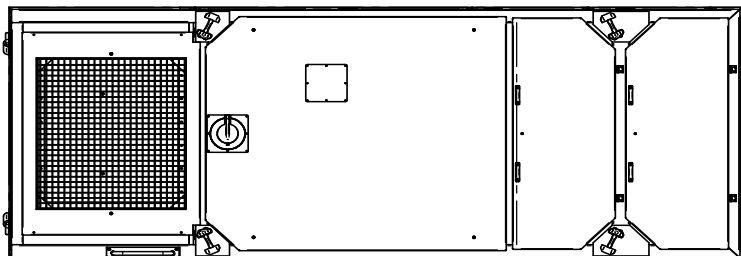

Specifications :

PVE 900 STAGE V / TIER 4F




Diesel Engine	Volvo TWD 1683 VE	
Max. theoretical power	585/796	kW/HP
Max. frequency	1900	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	972	L/min
Diesel oil	1045	L
DEF (AdBlue) capacity	70	L
Hydraulic oil	2200	L
Weight without fuel	9500	kg
Weight filled up	10400	kg



Technische Daten PVE 900 STAGE V / TIER 4F

Aggregat

Deutsch

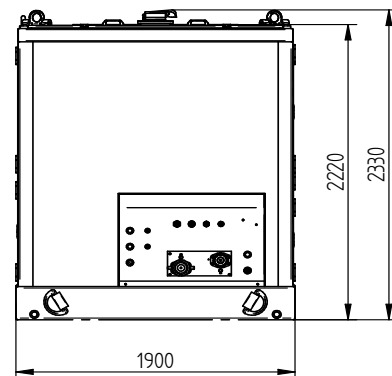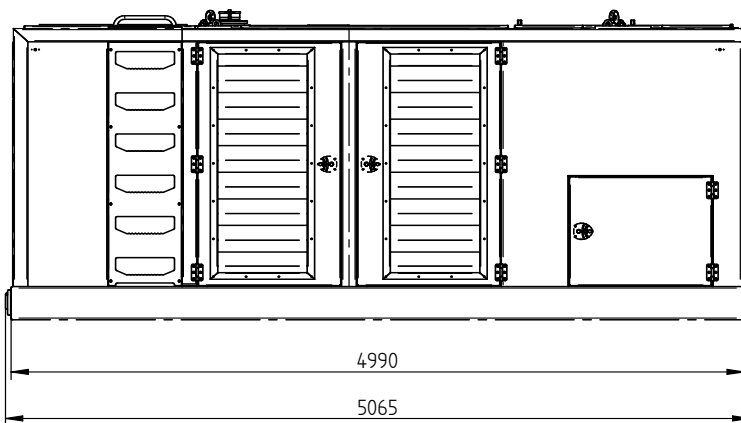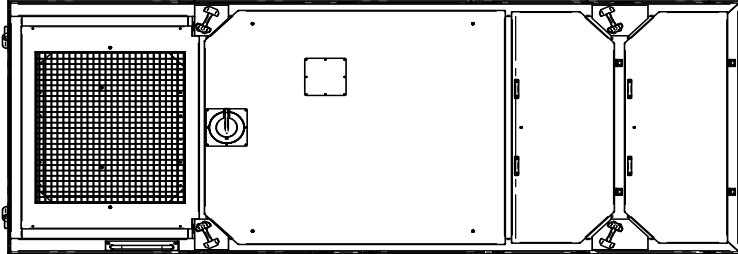

Technische Daten :

PVE 900 STAGE V / TIER 4F

Dieselmotor	Volvo TWD 1683 VE	
Max. theoretische Leistung	585/796	kW/HP
Max. Drehzahl	1900	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	972	L/min
Diesel Öl	1045	L
DAF (AdBlue) kapazität	70	L
Hydraulische Öl	2200	L
Gewicht ohne Diesel Öl	9500	kg
Gewicht	10400	kg






Spécifications

PVE 900 STAGE V / TIER 4F

Groupe hydraulique

Français

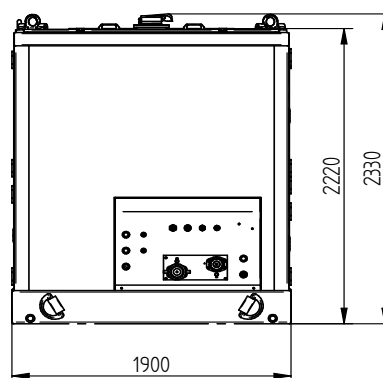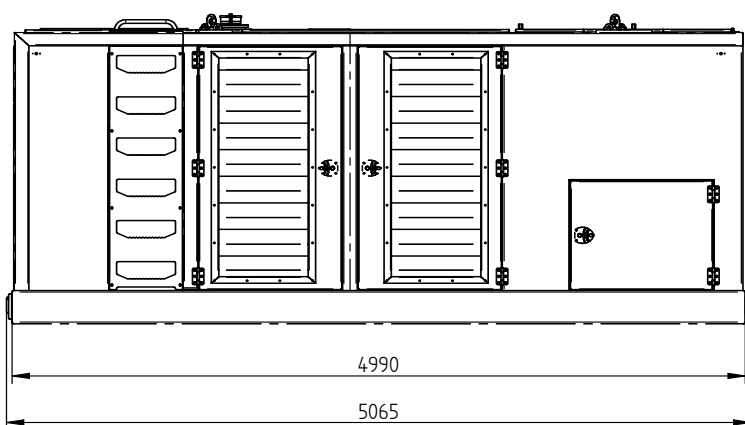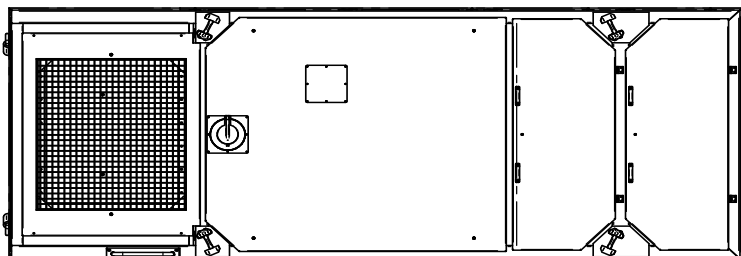

Spécifications

PVE 900 STAGE V / TIER 4F

Moteur Diesel	Volvo TWD 1683 VE	
Puissance théorique max.	585/796	kW/HP
Max. fréquence	1900	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	972	L/min
Huile diesel	1045	L
Capacité FED (AdBlue)	70	L
Huile hydraulique	2200	L
Poids sans huile diesel	9500	kg
Poids	10400	kg






Specificaties

PVE 900 STAGE V / TIER 4F

Hydraulisch aggregaat

Nederlands

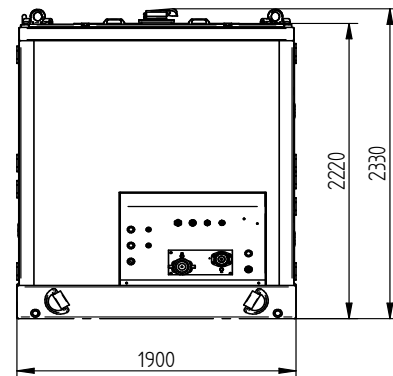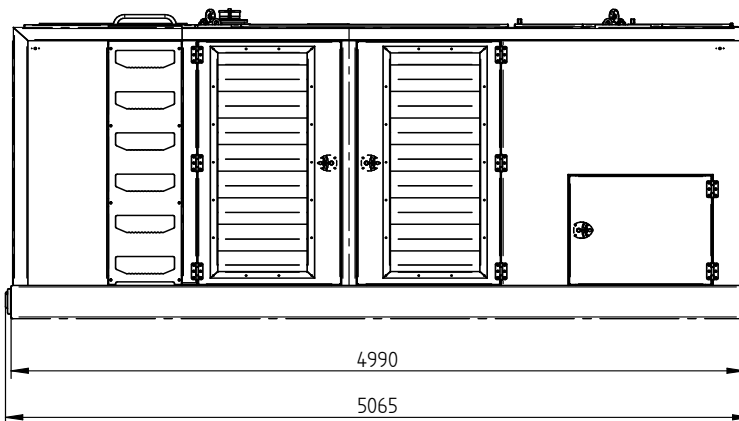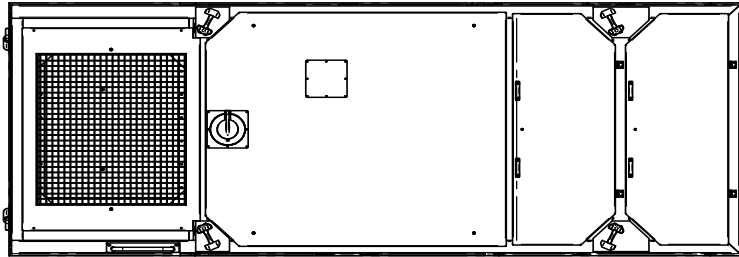

Specificaties

PVE 900 STAGE V / TIER 4F




Dieselmotor	Volvo TWD 1683 VE	
Max. theoretisch vermogen	585/796	kW/HP
Max. toerental	1900	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	972	L/min
Diesel olie	1045	L
DEF (AdBlue) capaciteit	70	L
Hydraulische olie	2200	L
Gewicht zonder diesel	9500	kg
Gewicht	10400	kg



Especificaciones PVE 900 STAGE V / TIER 4F

Unidad de potencia

Español

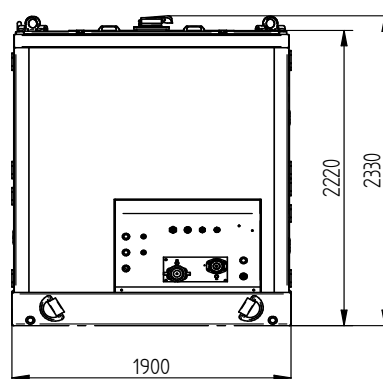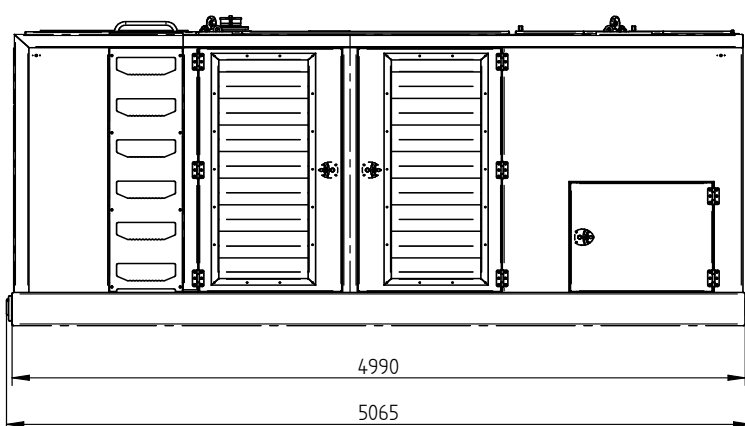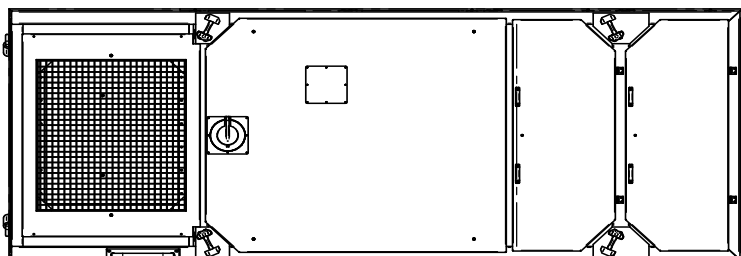

Especificaciones

PVE 900 STAGE V / TIER 4F

Motor de diesel	Volvo TWD 1683 VE	
Potencia Máxima teórica	585/796	kW/HP
Frecuencia máxima	1900	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Parker	
Flujo de aceite máximo	972	L/min
Gasóleo	1045	L
Capacidad DEF (AdBlue)	70	L
El aceite hidráulico	2200	L
Peso sin gasóleo	9500	kg
Peso	10400	kg






Specifications

PVE 900 STAGE V / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

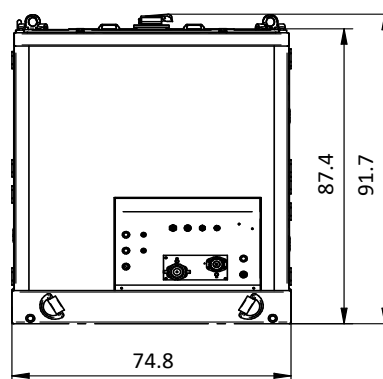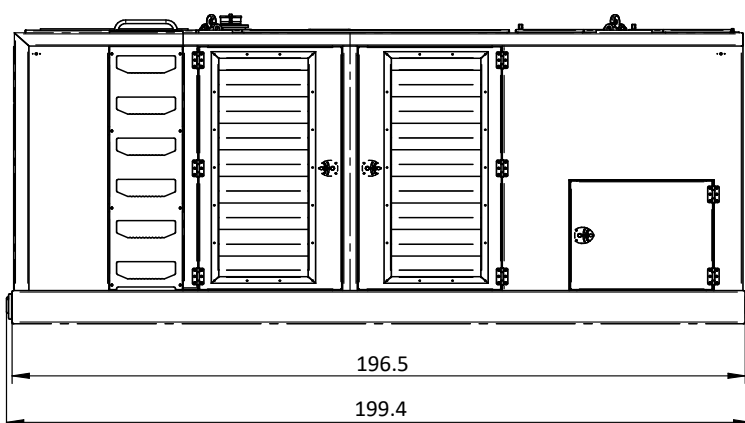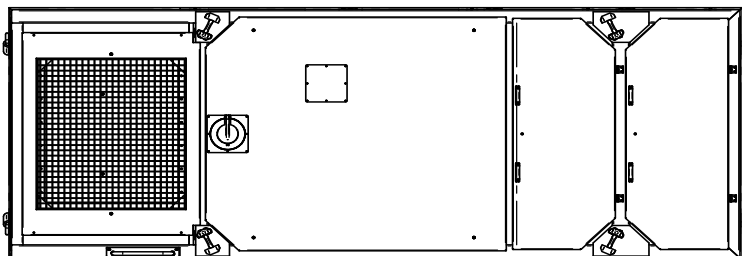

Specifications

PVE 900 STAGE V / TIER 4F

Diesel Engine	Volvo TWD 1683 VE	
Max. theoretical power	585/796	kW/HP
Max. frequency	1,900	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Parker	
Max. oil flow	257	gal/min
Diesel Fuel	276	gal
DEF (AdBlue) capacity	18	gal
Hydraulic oil	581	gal
Weight without fuel	20,944	lbs
Weight with fuel	22,928	lbs






Specificatii

PVE 900 STAGE V / TIER 4F

unitate de putere hidraulica

românesc

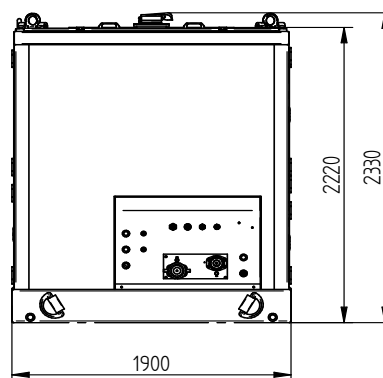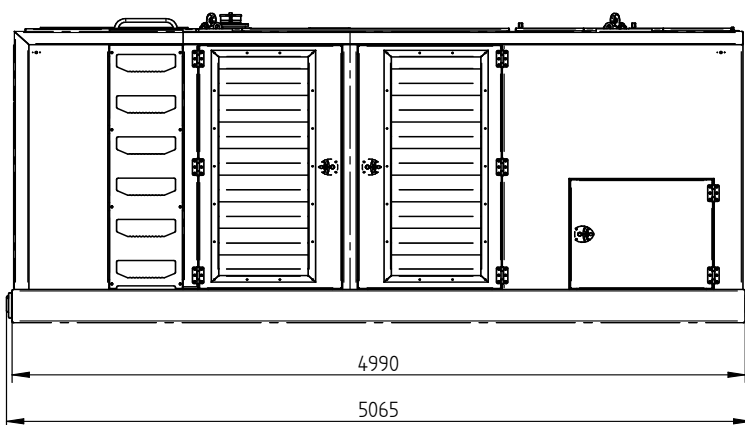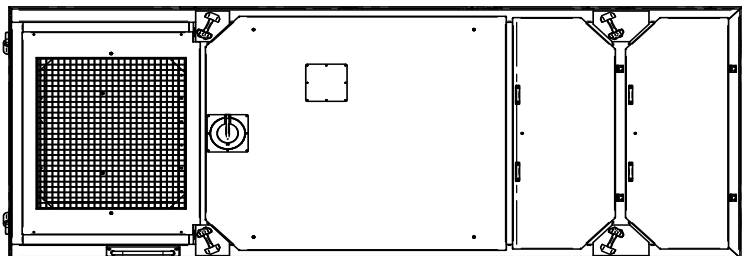**Specificatii :****PVE 900 STAGE V / TIER 4F**

Motor diesel	Volvo TWD 1683 VE	
Puterea maxima teoretica	585/796	kW/HP
Frecventa maxima	1900	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit maxim de ulei	972	L/min
motorină	1045	L
Capacitate rezervor aditiv AdBlue	70	L
Ulei hidraulic	2200	L
Greutatea fara combustibil	9500	kg
Greutatea cu combustibil	10400	kg