

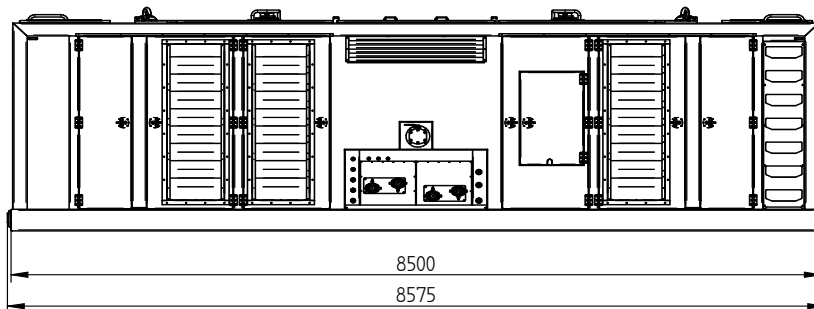


Specification sheet

ICE 2000 STAGE V / TIER 4F

Hydraulic Power Pack




English

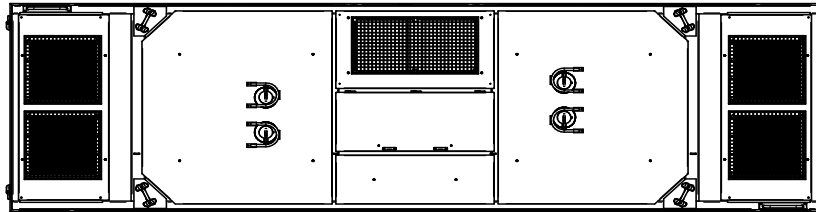

Specifications :

ICE 2000 STAGE V / TIER 4F

Diesel Engine	Caterpillar C27 (2x)	
Max. theoretical power	1418/1900	kW/HP
Max. frequency	1800	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	2200	L/min
Diesel oil	2530	L
DEF (AdBlue) capacity	N.A.	L
Hydraulic oil	4130	L
Weight without fuel	23550	kg
Weight filled up	25700	kg

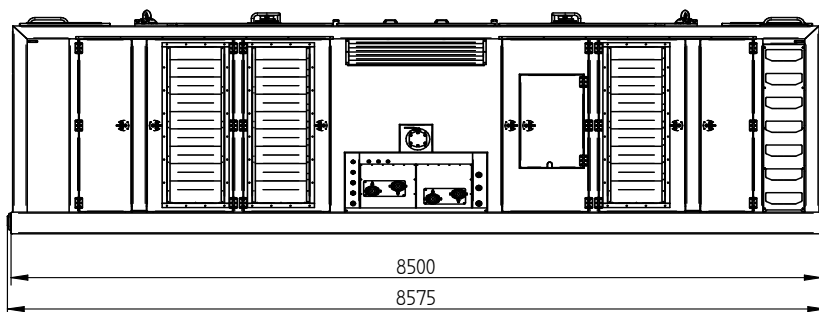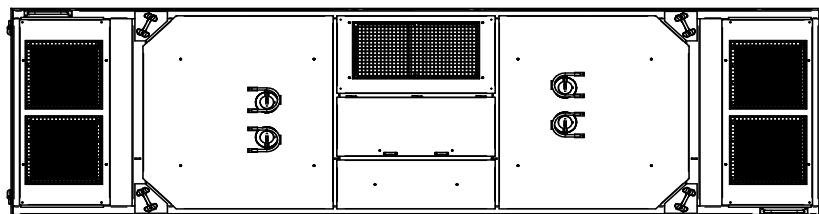

Technische Daten :

ICE 2000 STAGE V / TIER 4F




Dieselmotor	Caterpillar C27 (2x)	
Max. theoretische Leistung	1418/1900	kW/HP
Max. Drehzahl	1800	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	2200	L/min
Diesel Öl	2530	L
DAF (AdBlue) kapazität	N.A.	L
Hydraulische Öl	4130	L
Gewicht ohne Diesel Öl	23550	kg
Gewicht	25700	kg

Spécifications

ICE 2000 STAGE V / TIER 4F

Groupe hydraulique

Français

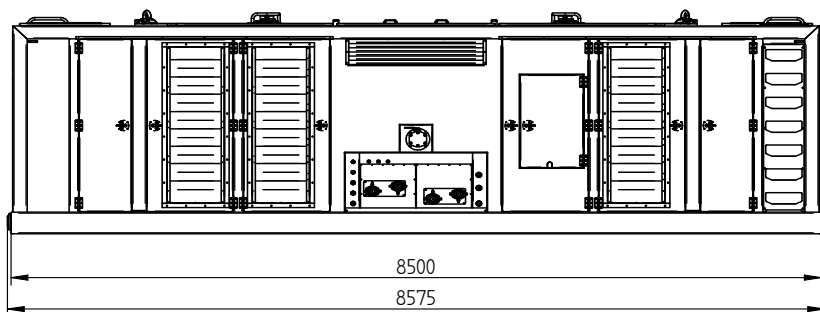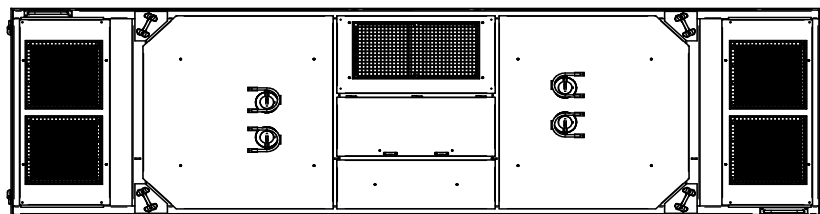

Spécifications

ICE 2000 STAGE V / TIER 4F




Moteur Diesel	Caterpillar C27 (2x)	
Puissance théorique max.	1418/1900	kW/HP
Max. fréquence	1800	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	2200	L/min
Huile diesel	2530	L
Capacité FED (AdBlue)	N.A.	L
Huile hydraulique	4130	L
Poids sans huile diesel	23550	kg
Poids	25700	kg

Specificaties

ICE 2000 STAGE V / TIER 4F

Hydraulisch aggregaat




Nederlands

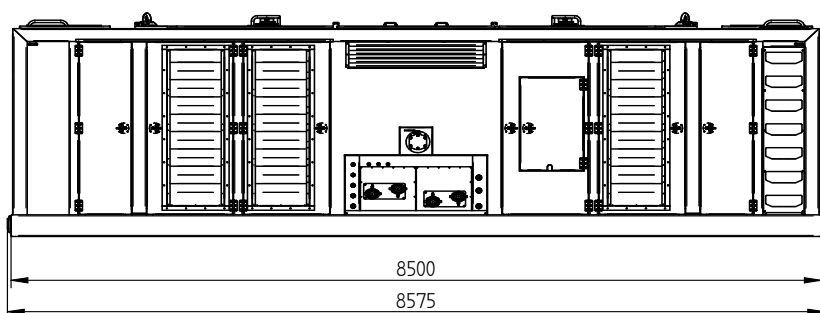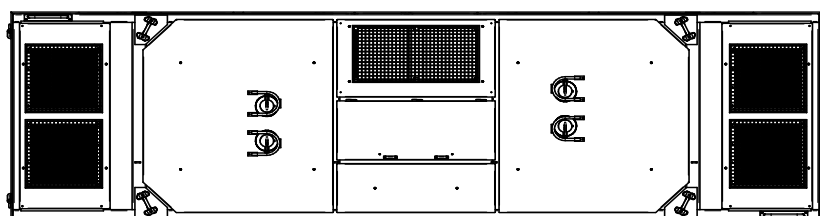

Specificaties

ICE 2000 STAGE V / TIER 4F

Dieselmotor	Caterpillar C27 (2x)	
Max. theoretisch vermogen	1418/1900	kW/HP
Max. toerental	1800	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	2200	L/min
Diesel olie	2530	L
DEF (AdBlue) capaciteit	N.A.	L
Hydraulische olie	4130	L
Gewicht zonder diesel	23550	kg
Gewicht	25700	kg

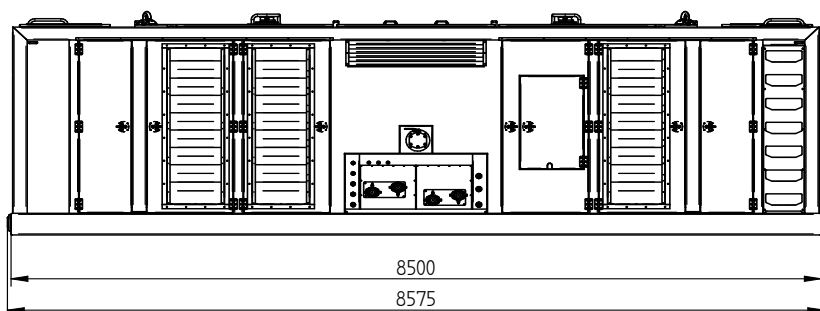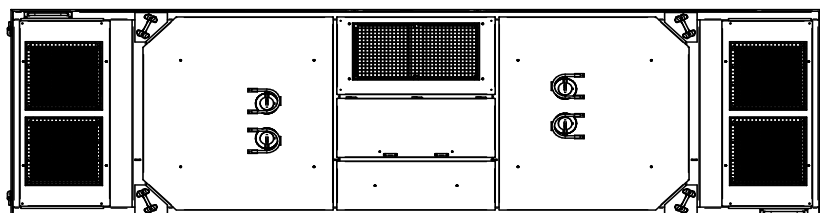

Especificaciones

ICE 2000 STAGE V / TIER 4F

Motor de diesel	Caterpillar C27 (2x)	
Potencia Máxima teórica	1418/1900	kW/HP
Frecuencia máxima	1800	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Parker	
Flujo de aceite máximo	2200	L/min
Gasóleo	2530	L
Capacidad DEF (AdBlue)	N.A.	L
El aceite hidráulico	4130	L
Peso sin gasóleo	23550	kg
Peso	25700	kg




Specifications

ICE 2000 STAGE V / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

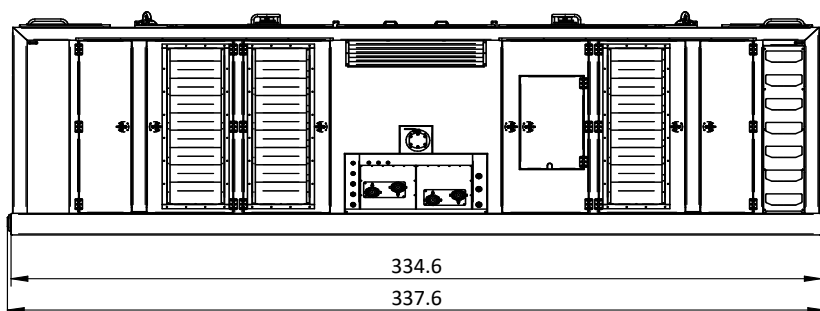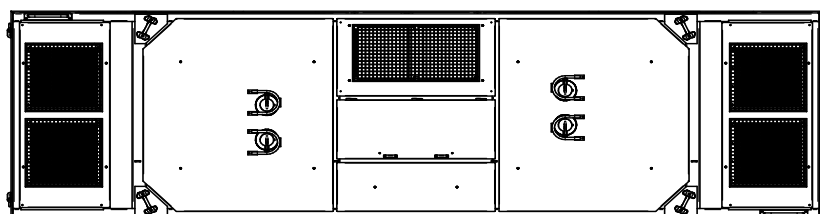

Specifications

ICE 2000 STAGE V / TIER 4F




Diesel Engine	Caterpillar C27 (2x)	
Max. theoretical power	1,418/1,900	kW/HP
Max. frequency	1800,	rpm
Max. operating pressure	5076,3	psi
Hydraulic pump	Parker	
Max. oil flow	581	gal/min
Diesel Fuel	668	gal
DEF (AdBlue) capacity	N.A.	gal
Hydraulic oil	1091	gal
Weight without fuel	51918,9	lbs
Weight with fuel	56658,8	lbs

Specificatii

ICE 2000 STAGE V / TIER 4F

unitate de putere hidraulica

românesc

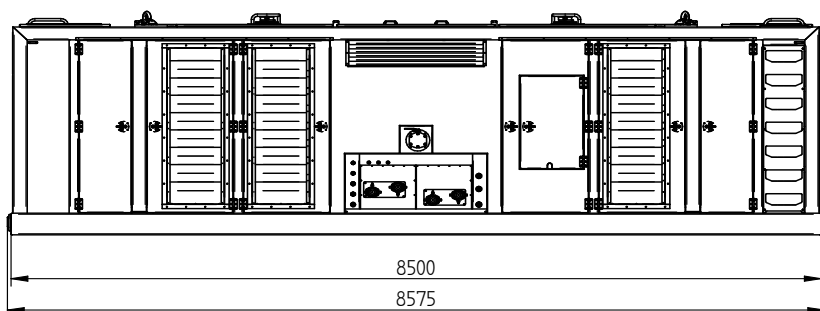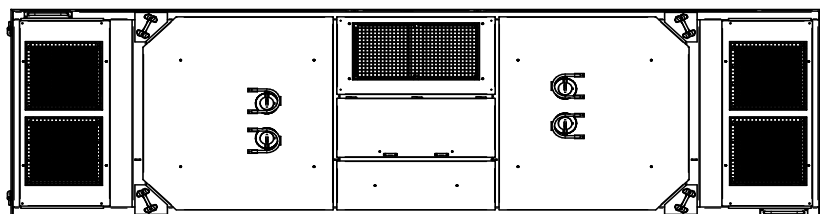

Specificatii :

ICE 2000 STAGE V / TIER 4F

Motor diesel	Caterpillar C27 (2x)	
Puterea maxima teoretica	1418/1900	kW/HP
Frecventa maxima	1800	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit maxim de ulei	2200	L/min
motorină	2530	L
Capacitate rezervor aditiv AdBlue	N.A.	L
Ulei hidraulic	4130	L
Greutate fara combustibil	23550	kg
Greutatea cu combustibil	25700	kg